

ENVIRONMENTAL PROTECTION



NRA

*National Rivers Authority
South West Region*

**River Erme Catchment
River Water Quality
Classification 1990**

**NOVEMBER 1991
WQP/91/009
B L MILFORD**

**GORDON H BIELBY BSc
Regional General Manager**

**C V M Davies
Environmental Protection
Manager**

ACKNOWLEDGEMENTS

The Water Quality Planner acknowledges the substantial contributions made by the following staff:

- R. Broome - Co-ordinator and Editor
- A. Burrows - Production of Maps and editorial support
- P. Grigorey - Production of Maps and editorial support
- B. Steele - Production of Forepage
- C. McCarthy - Administration and report compilation

Special thanks are extended to A. Burghes of Moonsoft, Exeter for computer support and the production of statistical schedules.

The following NRA sections also made valuable contributions:

- Pollution Control
- Field Control and Wardens
- Water Resources

Thanks also to R. Hamilton and J. Murray-Bligh for their contributions.

Suggestions for improvements that could be incorporated in the production of the next Classification report would be welcomed.

Further enquiries regarding the content of these reports should be addressed to:

Freshwater Scientist,
National Rivers Authority,
Manley House,
Kestrel Way,
EXETER,
Devon EX2 7LQ

ENVIRONMENT AGENCY




130034

RIVER WATER QUALITY IN THE RIVER ERME CATCHMENT

LIST OF CONTENTS

	Page No.
1 Introduction	1
2 River Erme Catchment	1
3 National Water Council's River Classification System	2
4 1990 River Water Quality Survey	2
5 1990 River Water Quality Classification	3
6 Non-compliance with Quality Objectives	4
7 Causes of Non-compliance	4
8 Glossary of Terms	5
9 References	5
10 Appendices:	
10.1 River Quality Objectives including Monitoring points	
10.2 Basic Determinand Analytical Suite	
10.3 National Water Council (NWC) River Classification System	
10.4 NWC Criteria for Non-Metallic Determinands - Regional Variation	
10.4.1 NWC Criteria for Metallic Determinands - Regional Variation	
10.5 1990 River Water Quality Classification - tabular format	
10.6 1990 River Water Quality Classification - map format	
10.7 Calculated Determinand Statistics used for Quality Assessment	
10.8 Compliant/Non-Compliant River Reaches	
10.9 Number of Samples Results exceeding quality standards	
10.10 Percentage Exceedance of Determinand Statistics from Quality Standard	
10.11 Identification of Possible Causes of Non-Compliance with River Quality Objectives	

**National Rivers Authority
South West Region**

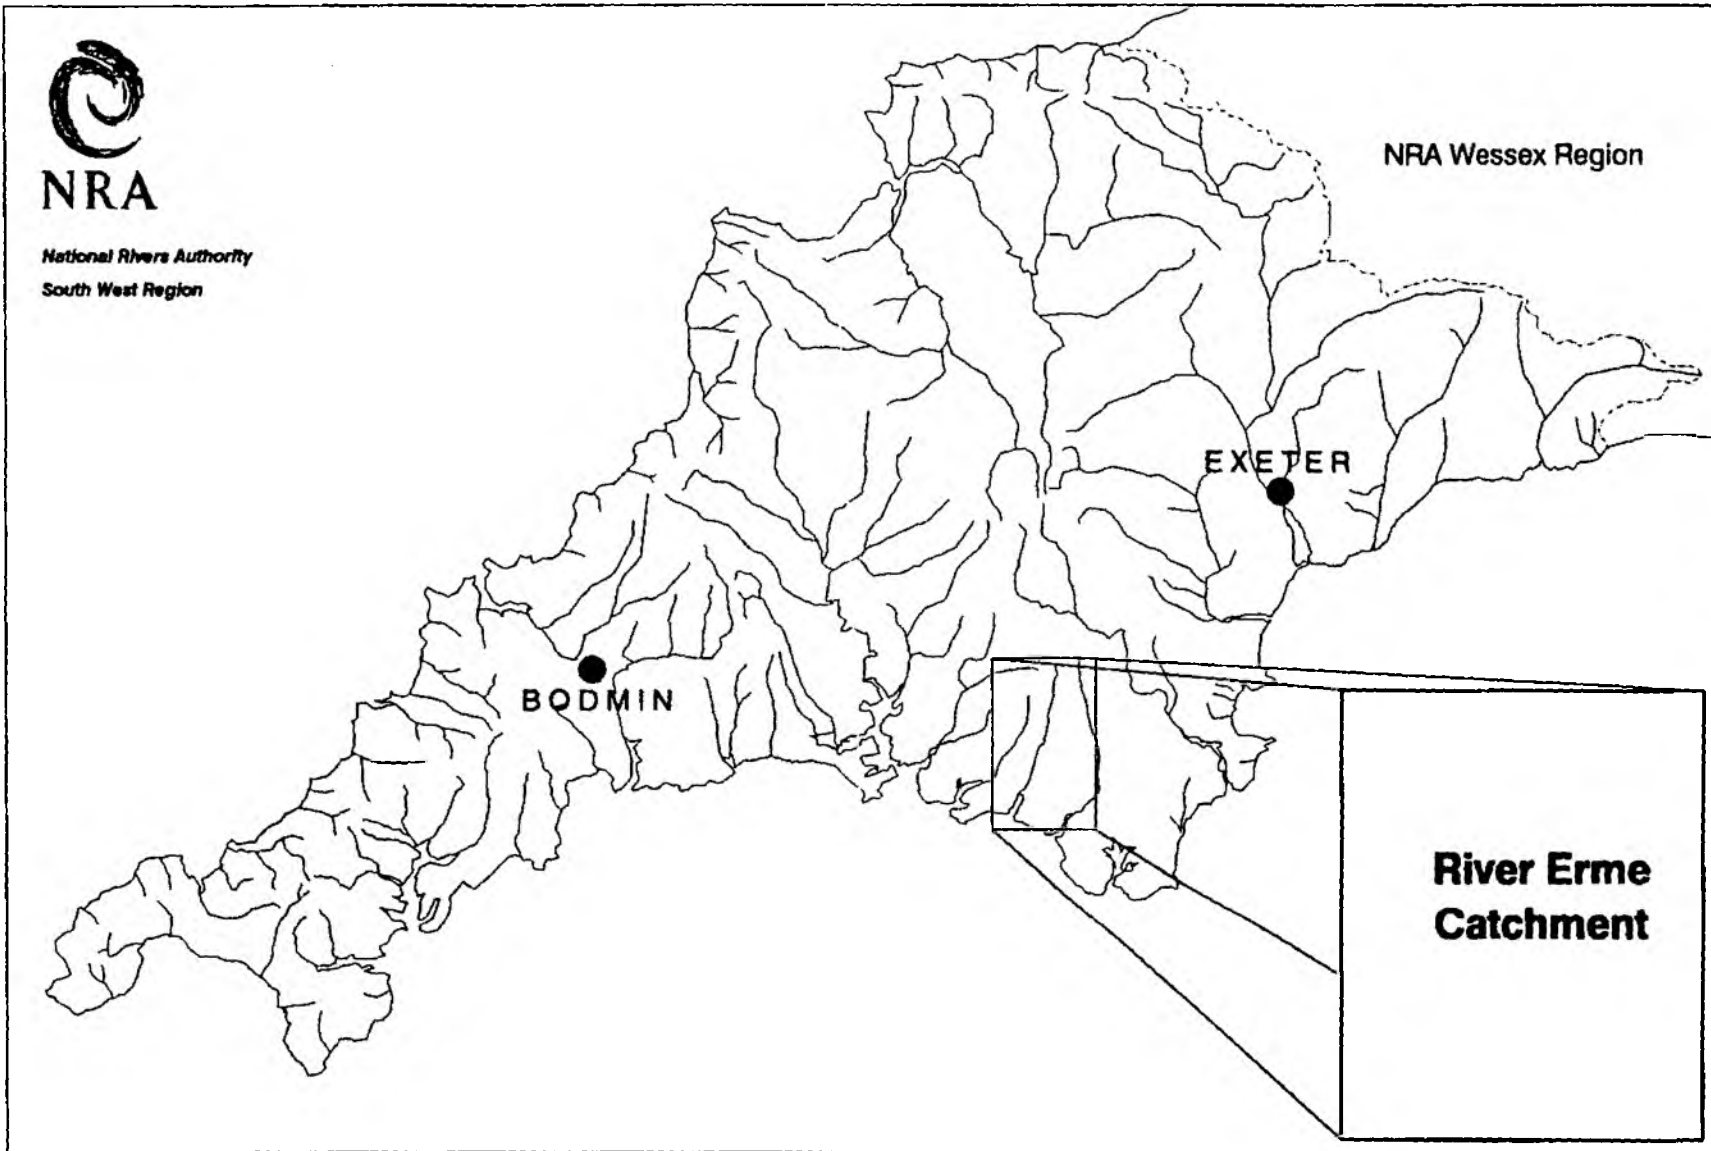

River Erme Catchment

**River Erme
Catchment**

1. INTRODUCTION

Monitoring to assess the quality of river waters is undertaken in thirty-two catchments within the region. As part of this monitoring programme samples are collected routinely from selected monitoring points at a pre-determined frequency per year, usually twelve spaced at monthly intervals. Each monitoring point provides data for the water quality of a river reach (in kilometres) upstream of the monitoring point.

River lengths have been re-measured and variations exist over those recorded previously.

Each water sample collected from each monitoring point is analysed for a range of chemical and physical constituents or properties known as determinands. The analytical results for each sample are entered into a computer database called the Water Quality Archive.

Selected data are accessed from the Archive so that the quality of each river reach can be determined based on a River Classification System developed by the National Water Council (NWC), (9.1).

This report presents the river water quality classification for 1990 for monitored river reaches in the River Erme catchment.

2. RIVER ERME CATCHMENT

The River Erme flows over a distance of 20.5 km from its source to the tidal limit, (Appendix 10.1). Water quality was monitored at six locations on the main river; five of these sites were sampled at approximately monthly intervals. The site at Sequer's Bridge, which is a National Water Quality monitoring point, was sampled fortnightly.

Throughout the Erme catchment one secondary tributary of the River Erme was monitored at approximately monthly intervals.

2.1 SECONDARY TRIBUTARY

The Lud Brook flows over a distance of 8.4 km from its source to the confluence with the River Erme, (Appendix 10.1) and was monitored at one location at approximately monthly intervals. Monitoring points are located in the lower reaches.

Each sample was analysed for a minimum number of determinands (Appendix 10.2) plus additional determinands based on local knowledge of the catchment. In addition, at selected sites, certain metal analyses were carried out.

The analytical results from all of these samples have been entered into the Water Quality Archive and can be accessed through the Water Act Register, (9.2).

3. NATIONAL WATER COUNCIL'S RIVER CLASSIFICATION SYSTEM

3.1 River Quality Objectives

In 1978 river quality objectives (RQOs) were assigned to all river lengths that were part of the routine monitoring network and to those additional watercourses, which were not part of the routine network, but which received discharges of effluents.

For the majority of watercourses long term objectives were identified based on existing and assumed adequate quality for the long term protection of the watercourse. In a few instances short term objectives were identified but no timetable for the achievement of the associated long term objective was set.

The RQOs currently in use in the River Erme catchment are identified in Appendix 10.1.

3.2 River Quality Classification

River water quality is classified using the National Water Council's (NWC) River Classification System (see Appendix 10.3), which identifies river water quality as being one of five quality classes as shown in Table 1 below:

Table 1 - National Water Council - River Classification System

<u>Class</u>	<u>Description</u>
1A	Good quality
1B	Lesser good quality
2	Fair quality
3	Poor quality
4	Bad quality

Using the NWC system, the classification of river water quality is based on the values of certain determinands as arithmetic means or as 95 percentiles (5 percentiles are used for pH and dissolved oxygen) as indicated in Appendices 10.4.1 and 10.4.2.

The quality classification system incorporates some of the European Inland Fisheries Advisory Commission (EIFAC) criteria (Appendix 10.3) recommended for use by the NWC system.

4. 1990 RIVER WATER QUALITY SURVEY

The 1990 regional classification of river water quality also includes the requirements of the Department of the Environment quinquennial national river quality survey. The objectives for the Department of the Environment 1990 River Quality Survey are given below:

- 1) To carry out a National Classification Survey based on procedures used in the 1985 National Classification Survey, including all regional differences.
- 2) To classify all rivers and canals included in the 1985 National Classification Survey.
- 3) To compare the 1990 Classification with those obtained in 1985.

In addition, those watercourses, which were not part of the 1985 Survey and have been monitored since that date, are included in the 1990 regional classification of river water quality.

5. 1990 RIVER WATER QUALITY CLASSIFICATION

Analytical data collected from monitoring during 1988, 1989 and 1990 were processed through a computerised river water quality classification programme. This resulted in a quality class being assigned to each monitored river reach as indicated in Appendix 10.5.

The quality class for 1990 can be compared against the appropriate River Quality Objective and previous annual quality classes (1985-1989) also based on three years combined data, for each river reach in Appendix 10.5.

The river water classification system used to classify each river length is identical to the system used in 1985 for the Department of the Environment's 1985 River Quality Survey. The determinand classification criteria used to determine the annual quality classes in 1985, subsequent years and for 1990 are indicated in Appendices 10.4 and 10.4.1.

Improvements to this classification system could have been made, particularly in the use of a different suspended solids standard for Class 2 waters. As the National Rivers Authority will be proposing new classification systems to the Secretary of State in the near future, it was decided to classify river lengths in 1990 with the classification used for the 1985-1989 classification period.

The adoption of the revised criteria for suspended solids in Class 2 waters would not have affected the classification of river reaches.

The river quality classes for 1990 of monitored river reaches in the catchment are shown in map form in Appendix 10.6.

The calculated determinand statistics for pH, temperature, dissolved oxygen, biochemical oxygen demand (BOD), total ammonia, un-ionised ammonia, suspended solids, copper and zinc from which the quality class was determined for each river reach, are indicated in Appendix 10.7.

6. NON-COMPLIANCE WITH QUALITY OBJECTIVES

Those monitored river reaches within the catchment, which do not comply with their assigned (RQO), are shown in map form in Appendix 10.8.

Appendix 10.9 indicates the number of samples analysed for each determinand over the period 1988 to 1990 and the number of sample results per determinand, which exceed the determinand quality standard.

For those non-compliant river reaches in the catchment, the extent of exceedance of the calculated determinand statistic with relevant quality standard (represented as a percentage), is indicated in Appendix 10.10.

7. CAUSES OF NON-COMPLIANCE

For those river reaches, which did not comply with their assigned RQOs, the cause of non-compliance (where possible to identify) is indicated in Appendix 10.11.

8. GLOSSARY OF TERMS


RIVER REACH	A segment of water, upstream from sampling point to the next sampling point.
RIVER LENGTH	River distance in kilometres.
RIVER QUALITY OBJECTIVE	That NWC class, which protects the most sensitive use of the water.
95 percentiles	Maximum limits, which must be met for at least 95% of the time.
5 percentiles	Minimum limits, which must be met for at least 95% of the time.
BIOLOGICAL OXYGEN DEMAND (5 day carbonaceous ATU)	A standard test measuring the microbial uptake of oxygen - an estimate of organic pollution.
pH	A scale of acid to alkali.
UN-IONISED AMMONIA	Fraction of ammonia poisonous to fish, NH^3 .
SUSPENDED SOLIDS	Solids removed by filtration or centrifuge under specific conditions.
USER REFERENCE NUMBER	Reference number allocated to a sampling point.
INFERRED STRETCH	Segment of water, which is not monitored and whose water quality classification is assigned from the monitored reach upstream.

9. REFERENCES

Reference

- 9.1 National Water Council (1977). River Water Quality: The Next Stage. Review of Discharge Consent Conditions. London.
- 9.2 Water Act 1989 Section 117
- 9.3 Alabaster J. S. and Lloyd R. Water Quality Criteria for Freshwater Fish, 2nd edition, 1982. Butterworths.

Erme Catchment River Quality Objectives

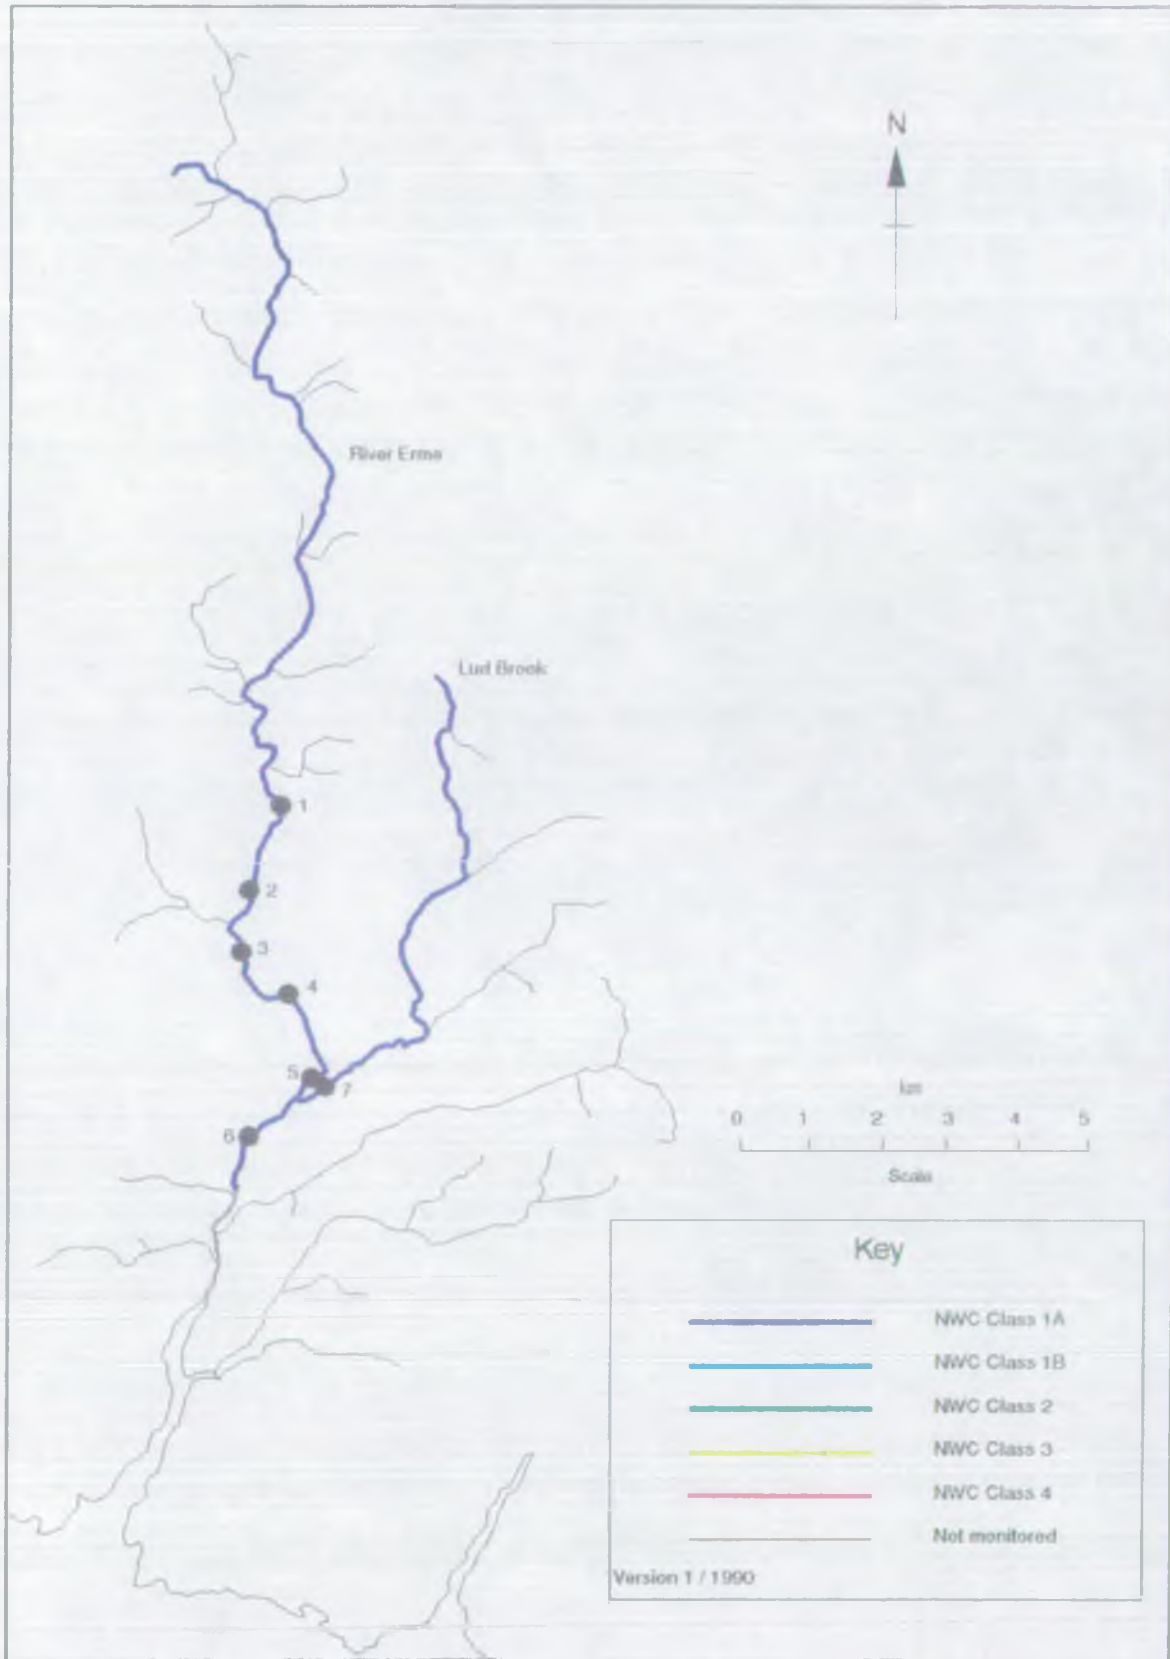

BASIC DETERMINAND ANALYTICAL SUITE FOR ALL CLASSIFIED RIVER SITES

pH as pH Units

Conductivity at 20 C as uS/cm

Water temperature (Cel)

Oxygen dissolved & saturation

Oxygen dissolved as mg/l O

Biochemical oxygen demand (5 day total ATU) as mg/l O

Total organic carbon as mg/l C

Nitrogen ammoniacal as mg/l N

Ammonia un-ionised as mg/l N

Nitrate as mg/l N

Nitrite as mg/l N

Suspended solids at 105 C as mg/l

Total hardness as mg/l CaCO₃

Chloride as mg/l Cl

Orthophosphate (total) as mg/l P

Silicate reactive dissolved as mg/l SiO₂

Sulphate (dissolved) as mg/l SO₄

Sodium (total) as mg/l Na

Potassium (total) as mg/l K

Magnesium (total) as mg/l Mg

Calcium (total) as mg/l Ca

Alkalinity as pH 4.5 as mg/l CaCO₃

MWC RIVER QUALITY CLASSIFICATION SYSTEM

River Class	Quality criteria	Remarks	Current potential uses
	Class limiting criteria (95 percentile)		
1A Good Quality	<ul style="list-style-type: none"> (i) Dissolved oxygen saturation greater than 80% (ii) Biochemical oxygen demand not greater than 3 mg/l (iii) Ammonia not greater than 0.4 mg/l (iv) Where the water is abstracted for drinking water, it complies with requirements for A2* water (v) Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available) 	<ul style="list-style-type: none"> (i) Average BOD probably not greater than 1.5 mg/l (ii) Visible evidence of pollution should be absent 	<ul style="list-style-type: none"> (i) Water of high quality suitable for potable supply abstractions and for all abstractions (ii) Game or other high class fisheries (iii) High amenity value
1B Good Quality	<ul style="list-style-type: none"> (i) DO greater than 60% saturation (ii) BOD not greater than 5 mg/l (iii) Ammonia not greater than 0.9 mg/l (iv) Where water is abstracted for drinking water, it complies with the requirements for A2* water (v) Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available) 	<ul style="list-style-type: none"> (i) Average BOD probably not greater than 2 mg/l (ii) Average ammonia probably not greater than 0.5 mg/l (iii) Visible evidence of pollution should be absent (iv) Waters of high quality which cannot be placed in Class 1A because of the high proportion of high quality effluent present or because of the effect of physical factors such as canalisation, low gradient or eutrophication (v) Class 1A and Class 1B together are essentially the Class 1 of the River Pollution Survey (RPS) 	Water of less high quality than Class 1A but usable for substantially the same purposes
2 Fair Quality	<ul style="list-style-type: none"> (i) DO greater than 40% saturation (ii) BOD not greater than 9 mg/l (iii) Where water is abstracted for drinking water it complies with the requirements for A3* water (iv) Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available) 	<ul style="list-style-type: none"> (i) Average BOD probably not greater than 5 mg/l (ii) Similar to Class 2 of RPS (iii) Water not showing physical signs of pollution other than humic colouration and a little foaming below weirs 	<ul style="list-style-type: none"> (i) Waters suitable for potable supply after advanced treatment (ii) Supporting reasonably good coarse fisheries (iii) Moderate amenity value

Poor Quality	(i) DO greater than 10% saturation (ii) Not likely to be anaerobic (iii) BOD not greater than 17 mg/l. This may not apply if there is a high degree of re-aeration	Similar to Class 3 of RPS	Waters which are polluted to an extent that fish are absent only sporadically present. May be used for low grade industrial abstraction purposes. Considerable potential for further use if cleaned up
-----------------	---	---------------------------	--

4 Bad Quality	Waters which are inferior to Class 3 in terms of dissolved oxygen and likely to be anaerobic at times	Similar to Class 4 of RPS	Waters which are grossly polluted and are likely to cause nuisance
------------------	---	---------------------------	--

X	DO greater than 10% saturation		Insignificant watercourses and ditches not usable, where the objective is simply to prevent nuisance developing
---	--------------------------------	--	---

- Notes
- (a) Under extreme weather conditions (eg flood, drought, freeze-up), or when dominated by plant growth, or by aquatic plant decay, rivers usually in Class 1, 2, and 3 may have BODs and dissolved oxygen levels, or ammonia content outside the stated levels for those Classes. When this occurs the cause should be stated along with analytical results.
 - (b) The BOD determinations refer to 5 day carbonaceous BOD (ATU). Ammonia figures are expressed as NH_4 . **
 - (c) In most instances the chemical classification given above will be suitable. However, the basis of the classification is restricted to a finite number of chemical determinands and there may be a few cases where the presence of a chemical substance other than those used in the classification markedly reduces the quality of the water. In such cases, the quality classification of the water should be down-graded on the basis of biota actually present, and the reasons stated.
 - (d) EIFAC (European Inland Fisheries Advisory Commission) limits should be expressed as 95 percentile limits.

EEC category A2 and A3 requirements are those specified in the EEC Council directive of 16 June 1975 concerning the Quality of Surface Water intended for Abstraction of Drinking Water in the Member State.

Ammonia Conversion Factors

(mg NH_4 /l to mg N/l)

Class 1A	0.4 mg NH_4 /l = 0.31 mg N/l
Class 1B	0.9 mg NH_4 /l = 0.70 mg N/l
	0.5 mg NH_4 /l = 0.39 mg N/l

NWC RIVER CLASSIFICATION SYSTEM

CRITERIA USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION FOR NON-METALLIC DETERMINANDS

River Class	Quality Criteria
1A	Dissolved oxygen % saturation greater than 80% BOD (ATU) not greater than 3 mg/l O Total ammonia not greater than 0.31 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 21.5 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
1B	Dissolved oxygen % saturation greater than 60% BOD (ATU) not greater than 5 mg/l O Total ammonia not greater than 0.70 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 21.5 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
2	Dissolved oxygen & saturation greater than 40% BOD (ATU) not greater than 9 mg/l O Total ammonia not greater than 1.56 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 28 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
3	Dissolved oxygen % saturation greater than 10% BOD (ATU) not greater than 17 mg/l O
4	Dissolved oxygen % saturation not greater than 10% BOD (ATU) greater than 17 mg/l O

STATISTICS USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION

Determinand	Statistic
Dissolved oxygen	5 percentile
BOD (ATU)	95 percentile
Total ammonia	95 percentile
Non-ionised ammonia	95 percentile
Temperature	95 percentile
pH	5 percentile
Suspended solids	95 percentile arithmetic mean

NWC RIVER CLASSIFICATION SYSTEM

CRITERIA USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION FOR METALLIC DETERMINANDS

SOLUBLE COPPER

Total Hardness (mean) mg/l CaCO ₃	Statistic	Soluble Copper*	
		Class 1 ug/l Cu	Class 2
0 - 10	95 percentile	< = 5	> 5
10 - 50	95 percentile	< = 22	> 22
50 - 100	95 percentile	< = 40	> 40
100 - 300	95 percentile	< = 112	> 112

* Total copper is used for classification until sufficient data on soluble copper can be obtained.

TOTAL ZINC


Total Hardness (mean) mg/l CaCO ₃	Statistic	Total Zinc		
		Class 1 ug/l Zn	Class 2	Class 3
0 - 10	95 percentile	< = 30	< = 300	> 300
10 - 50	95 percentile	< = 200	< = 700	> 700
50 - 100	95 percentile	< = 300	< = 1000	> 1000
100 - 300	95 percentile	< = 500	< = 2000	> 2000

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION
 1990 RIVER WATER QUALITY CLASSIFICATION
 CATCHMENT : ERME (09)

1990 Map Position Number	River	Reach upstream of	User Reference Number	National Grid Reference
1	ERME	STOWFORD WEIR	R09B001	SX 6386 5718
2	ERME	A.38 BRIDGE IVYBRIDGE	R09B012	SX 6331 5576
3	ERME	CLEEVE	R09B002	SX 6335 5520
4	ERME	LOWER KEATON	R09B010	SX 6405 5448
5	ERME	FAMN'S BRIDGE	R09B011	SX 641 531
6	ERME	SEQUER'S BRIDGE	R09B003	SX 6321 5188
	ERME	NORMAL TIDAL LIMIT (INFERRED STRETCH)		
7	LJD BROOK	FAMN'S BRIDGE	R09B017	SX 6404 5308
	LJD BROOK	ERME CONFLUENCE (INFERRED STRETCH)		

Reach Length (km)	Distance from source (km)	River Quality Objective	85 NWC Class	86 NWC Class	87 NWC Class	88 NWC Class	89 NWC Class	90 NWC Class
13.0	13.0	1A	1A	1A	1A	1A	1A	2
1.7	14.7	1A	1A	1B	1A	1A	1A	1A
0.7	15.4	1A	2	2	2	2	2	2
1.2	16.6	1A	1B	2	2	2	2	1B
1.7	18.3	1A	1A	1B	1B	1B	1B	1A
1.8	20.1	1A	1A	2	2	2	1B	1B
0.4	20.5	1A	1A	2	2	2	1B	1B
8.2	8.2	1A						
0.2	8.4	1A						

Erme Catchment Water Quality - 1990

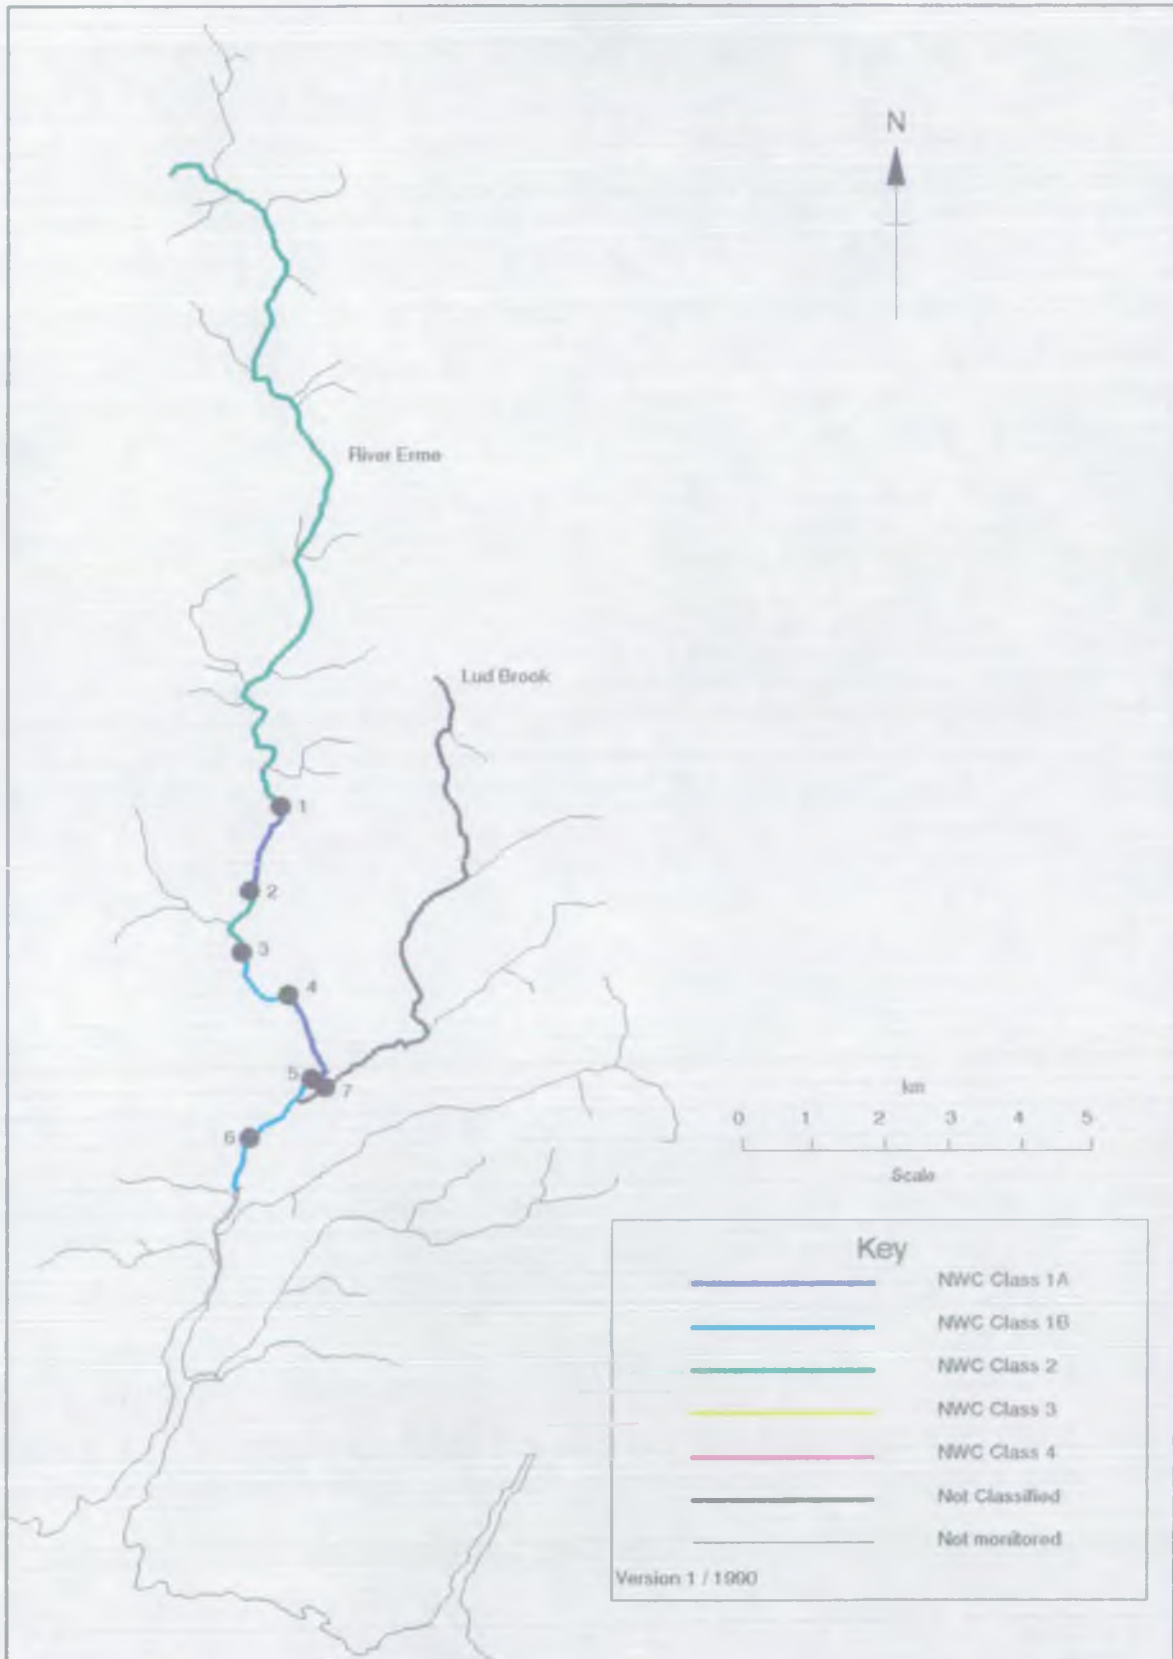

INTERIM RIVER WATER QUALITY - SOUTH WEST RESULTS

1990 RIVER WATER QUALITY CLASSIFICATION


CALCULATED DETERMINED STATISTICS USED FOR QUALITY ASSESSMENT

CRITERIA : ERW (09)

Line	90	Ref. No.	Reach upstream of	Line	90	Ref. No.	Reach upstream of
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	6.0	2	6.0	2	6.0	2	6.0
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	14.5	2	14.5	2	14.5	2	14.5
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	6.2	2	6.2	2	6.2	2	6.2
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	6.8	2	6.8	2	6.8	2	6.8
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	7.5	2	7.5	2	7.5	2	7.5
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	7.6	2	7.6	2	7.6	2	7.6
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	7.2	2	7.2	2	7.2	2	7.2
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	7.7	2	7.7	2	7.7	2	7.7
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	18.0	2	18.0	2	18.0	2	18.0
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	89.7	2	89.7	2	89.7	2	89.7
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	89.9	2	89.9	2	89.9	2	89.9
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	2.5	2	2.5	2	2.5	2	2.5
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	1.8	2	1.8	2	1.8	2	1.8
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	0.042	2	0.042	2	0.042	2	0.042
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	0.119	2	0.119	2	0.119	2	0.119
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	0.997	2	0.997	2	0.997	2	0.997
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	0.683	2	0.683	2	0.683	2	0.683
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	0.190	2	0.190	2	0.190	2	0.190
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	3.3	2	3.3	2	3.3	2	3.3
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	7.5	2	7.5	2	7.5	2	7.5
1A	10.0	1A	10.0	1A	10.0	1A	10.0
1B	10.0	1A	7.0	1A	7.0	1A	7.0
2	16.0	2	16.0	2	16.0	2	16.0

Calculated Determined Statistics used for Quality Assessment

Erme Catchment Compliance - 1990

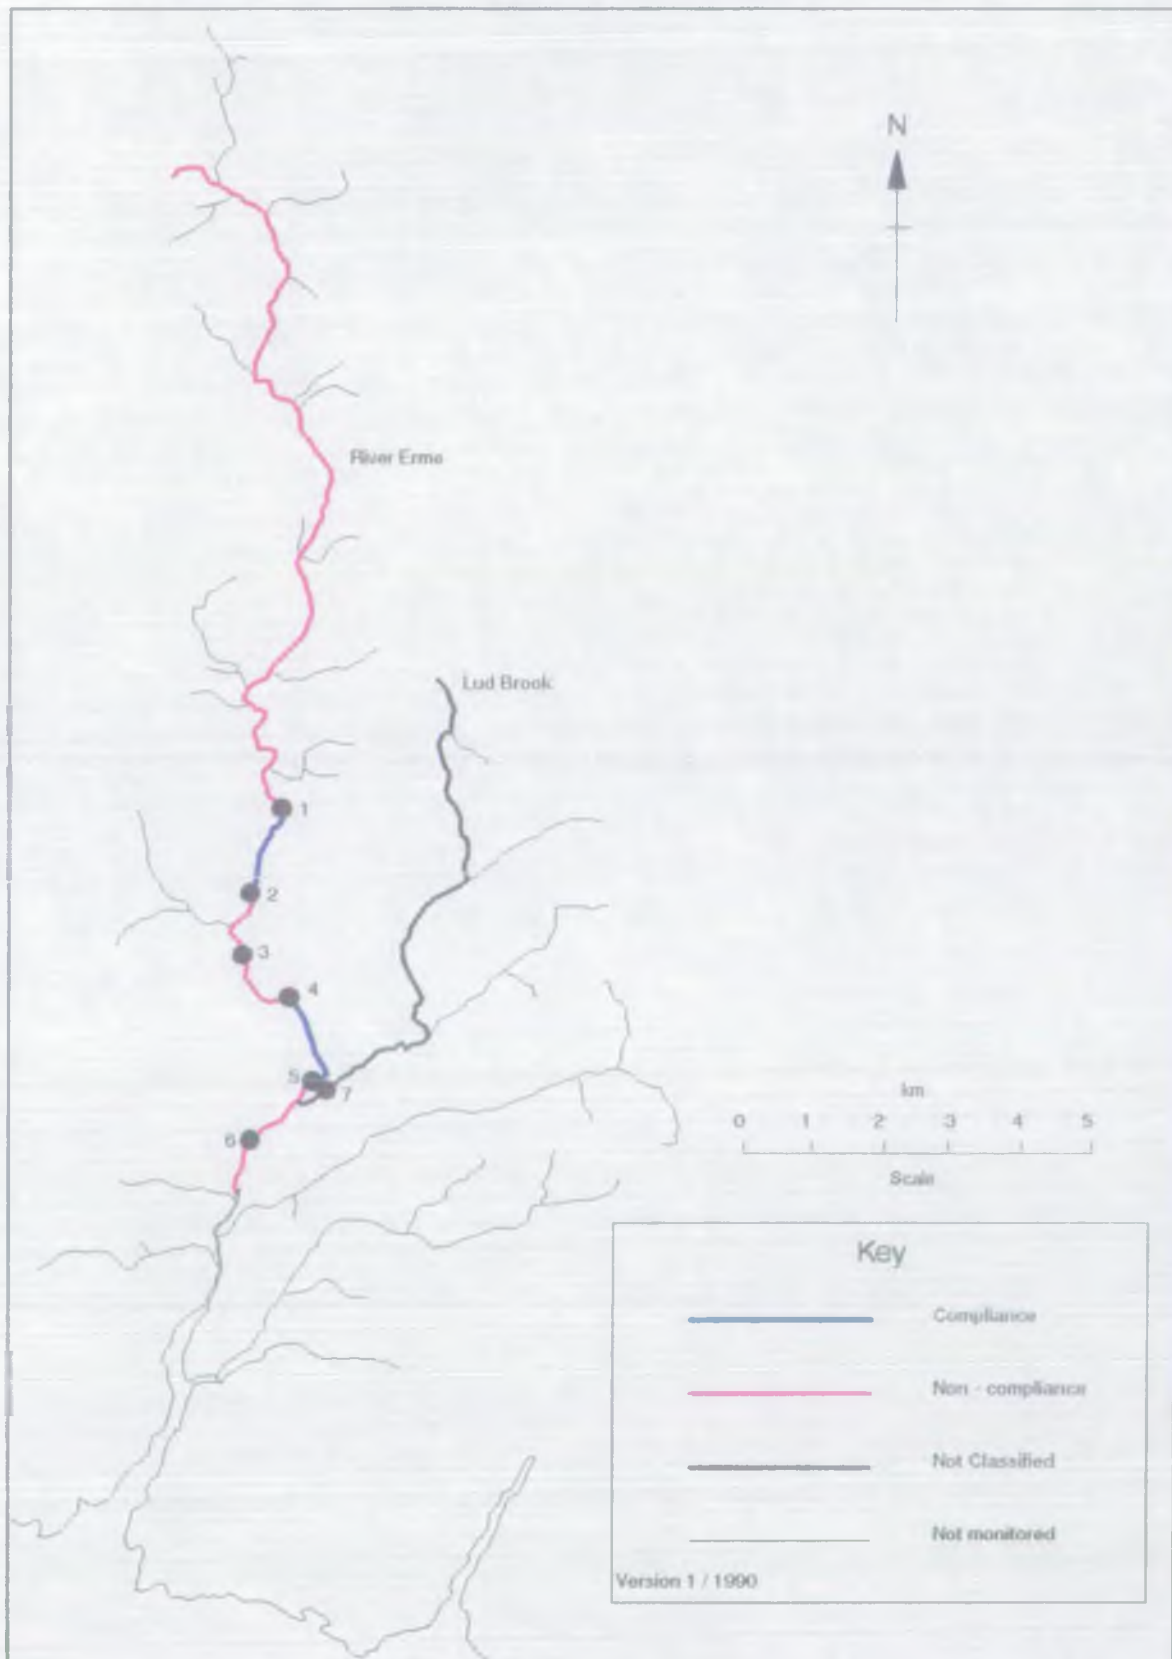

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION

1990 RIVER WATER QUALITY CLASSIFICATION

NUMBER OF SAMPLES (N) AND NUMBER OF SAMPLES EXCEEDING QUALITY STANDARD (F)

CATCHMENT : ERME (09)

River	Reach upstream of	User Ref. Number	pH Lower		pH Upper		Temperature		DO (%)		BOD (AUV)		Total Ammonia		Union. Ammonia		S.Solids		Total Copper		Total Zinc	
			N	F	N	F	N	F	N	F	N	F	N	F	N	F	N	F	N	F	N	F
ERME	SIGWOLD WEIR	RO9B001	38	-	38	-	38	-	38	-	38	-	38	-	25	-	38	-	12	2	12	-
ERME	A.38 BRIDGE (YBRIDGE)	RO9B012	38	-	38	-	38	-	38	-	38	-	38	-	26	-	38	-	12	-	12	-
ERME	CLEEVE	RO9B002	38	-	38	-	38	-	38	1	38	1	38	5	38	-	38	-	30	-	30	-
ERME	LOWER REACH	RO9B010	38	-	38	-	38	-	38	-	38	1	38	3	37	-	38	-	0	-	0	-
ERME	PAWY'S BRIDGE	RO9B011	39	-	39	-	39	-	39	-	39	-	39	-	39	-	39	-	0	-	0	-
ERME	SEWER'S BRIDGE	RO9B003	62	-	62	-	61	-	61	3	62	-	62	-	61	-	62	-	44	-	44	-

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION
 1990 RIVER WATER QUALITY CLASSIFICATION
 PERCENTAGE EXCEEDENCE OF DETERMINAND STATISTICS FROM QUALITY STANDARDS
 CATCHMENT : ERME (09)

River	Reach upstream of	User Ref. Number	PERCENTAGE EXCEEDENCE OF STATISTIC FROM QUALITY STANDARD									
			pH Lower	pH Upper	Temperature	DO (%)	BOD (ATU)	Total Ammonia	Un-ionised Ammonia	Suspended Solids	Total Copper	Total Zinc
ERME	STOWFORD WEIR	R09B001	-	-	-	-	-	-	-	-	20	-
ERME	A.38 BRIDGE IVYBRIDGE	R09B012	-	-	-	-	-	-	-	-	-	-
ERME	CLEEVE	R09B002	-	-	-	-	-	222	-	-	-	-
ERME	LOWER KEATON	R09B010	-	-	-	-	-	120	-	-	-	-
ERME	FAMN'S BRIDGE	R09B011	-	-	-	-	-	-	-	-	-	-
ERME	SEQUER'S BRIDGE	R09B003	-	-	-	1	-	-	-	-	-	-

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION
 IDENTIFICATION OF POSSIBLE CAUSES OF NON-COMPLIANCE WITH RQO
 CATCHMENT : ERME (09)

1990 Map Position Number	River	Reach upstream of	User Reference Number	Reach Length (km)	Possible causes of non-compliance
1	ERME	STOWFORD WEIR	R09B001	13.0	MOORLAND, CATCHMENT GEOLOGY, UP-STREAM ABSTRACTIONS
3	ERME	CLEEVE	R09B002	0.7	SEWAGE TREATMENT WORKS, INDUSTRIAL DISCHARGE
4	ERME	LOWER KEATON	R09B010	1.2	SEWAGE TREATMENT WORKS, UP-STREAM ABSTRACTIONS
6	ERME	SEQUER'S BRIDGE	R09B003	1.8	SEWAGE TREATMENT WORKS, DROUGHT