

ENVIRONMENTAL PROTECTION



NRA

*National Rivers Authority
South West Region*

**Porth, Gluvian and
Menalhyl Catchment
River Water Quality
Classification 1990**

**NOVEMBER 1991
WQP/91/027
B L MILFORD**

**GORDON H BIELBY BSc
Regional General Manager**

**C V M Davies
Environmental Protection
Manager**

ACKNOWLEDGEMENTS

The Water Quality Planner acknowledges the substantial contributions made by the following staff:

- R. Broome - Co-ordinator and Editor
- A. Burrows - Production of Maps and editorial support
- P. Grigorey - Production of Maps and editorial support
- B. Steele - Production of Forepage
- C. McCarthy - Administration and report compilation

Special thanks are extended to A. Burghes of Moonsoft, Exeter for computer support and the production of statistical schedules.

The following NRA sections also made valuable contributions:

- Pollution Control
- Field Control and Wardens
- Water Resources

Thanks also to R. Hamilton and J. Murray-Bligh for their contributions.

Suggestions for improvements that could be incorporated in the production of the next Classification report would be welcomed.

Further enquiries regarding the content of these reports should be addressed to:

Freshwater Scientist,
National Rivers Authority,
Manley House,
Kestrel Way,
EXETER,
Devon EX2 7LQ

ENVIRONMENT AGENCY




047336

RIVER WATER QUALITY IN THE PORTH, GLUVIAN AND MENALHYL CATCHMENTS

LIST OF CONTENTS

	Page No.
1 Introduction	1
2 Porth, Gluvian and Menalhyl Catchments	1
3 National Water Council's River Classification System	2
4 1990 River Water Quality Survey	3
5 1990 River Water Quality Classification	4
6 Non-compliance with Quality Objectives	4
7 Causes of Non-compliance	5
8 Glossary of Terms	6
9 References	6
10 Appendices:	
10.1 River Quality Objectives including Monitoring points	
10.2 Basic Determinand Analytical Suite	
10.3 National Water Council (NWC) River Classification System	
10.4 NWC Criteria for Non-Metallic Determinands - Regional Variation	
10.4.1 NWC Criteria for Metallic Determinands - Regional Variation	
10.5 1990 River Water Quality Classification - tabular format	
10.6 1990 River Water Quality Classification - map format	
10.7 Calculated Determinand Statistics used for Quality Assessment	
10.8 Compliant/Non-Compliant River Reaches	
10.9 Number of Samples Results exceeding quality standards	
10.10 Percentage Exceedance of Determinand Statistics from Quality Standard	
10.11 Identification of Possible Causes of Non-Compliance with River Quality Objectives	

National Rivers Authority South West Region

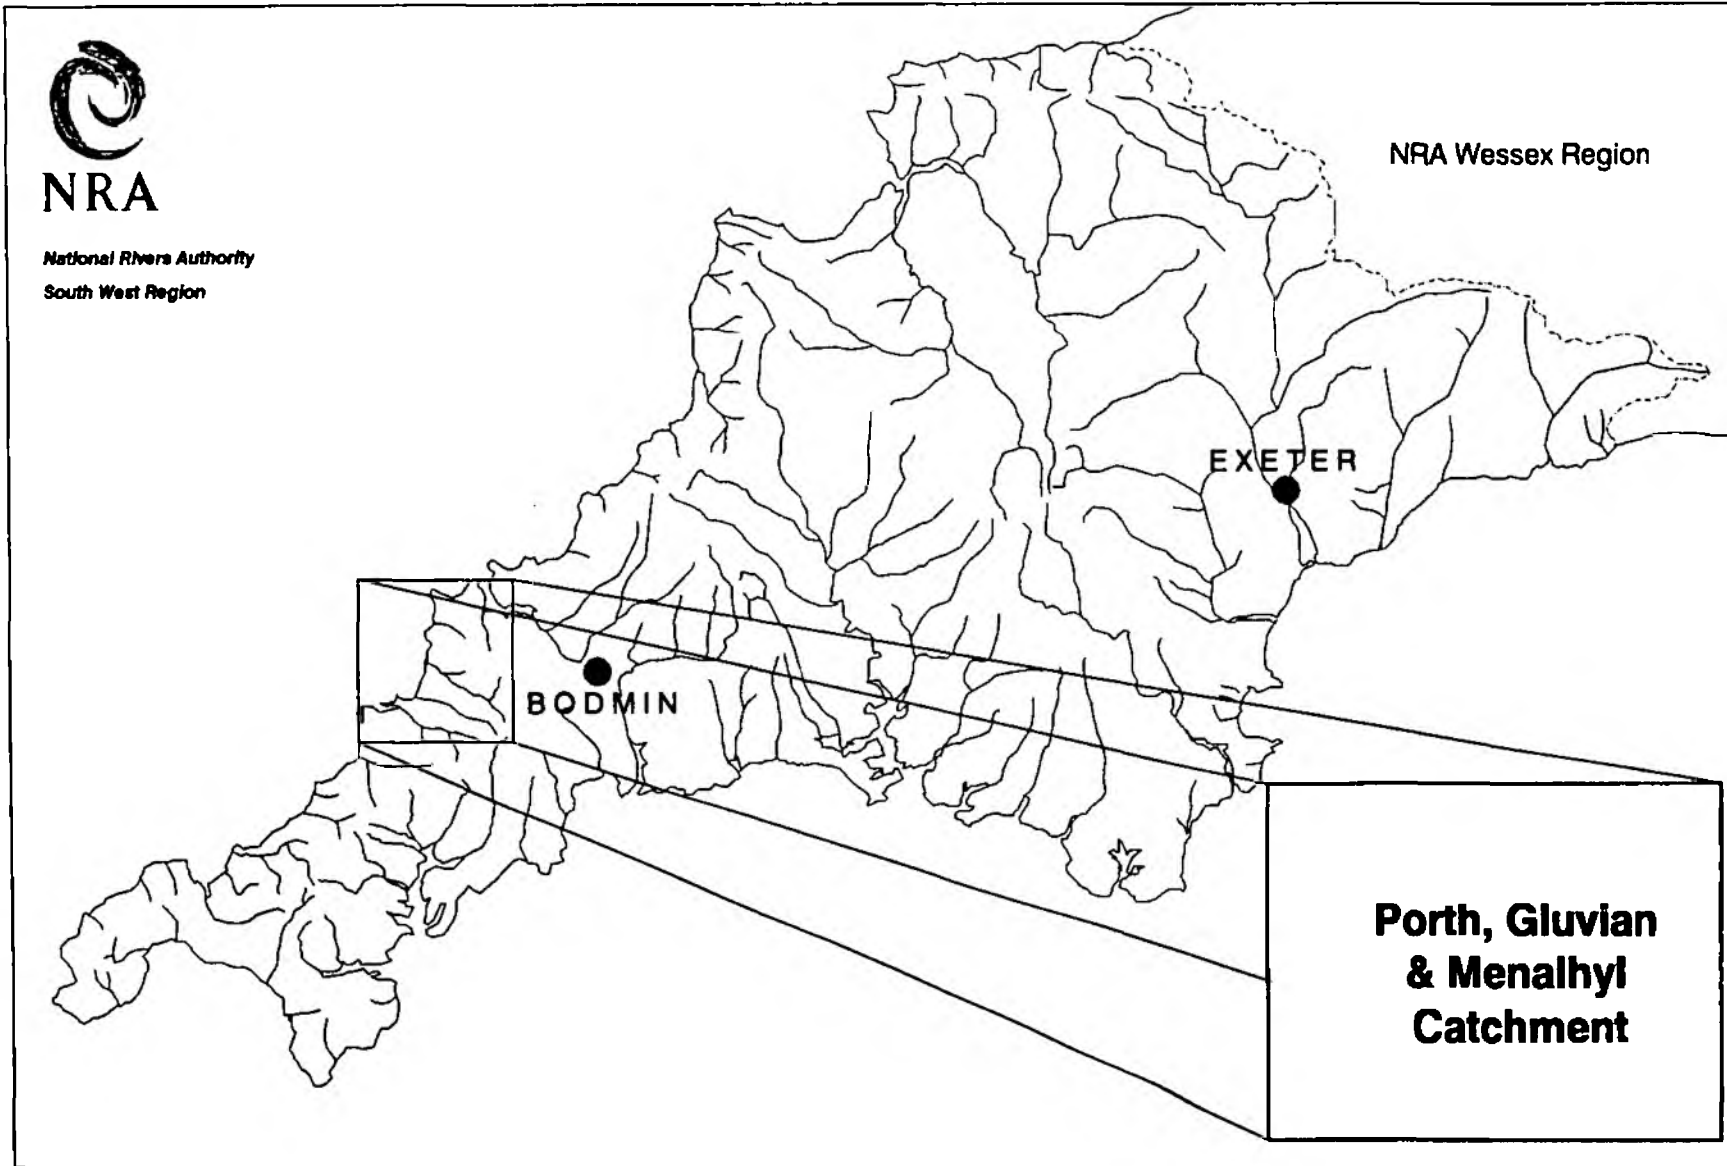

Porth, Gluvian & Menalhyl Catchment

**Porth, Gluvian
& Menalhyl
Catchment**

1. INTRODUCTION

Monitoring to assess the quality of river waters is undertaken in thirty-two catchments within the region. As part of this monitoring programme samples are collected routinely from selected monitoring points at a pre-determined frequency per year, usually twelve spaced at monthly intervals. Each monitoring point provides data for the water quality of a river reach (in kilometres) upstream of the monitoring point.

River lengths have been re-measured and variations exist over those recorded previously.

Each water sample collected from each monitoring point is analysed for a range of chemical and physical constituents or properties known as determinands. The analytical results for each sample are entered into a computer database called the Water Quality Archive.

Selected data are accessed from the Archive so that the quality of each river reach can be determined based on a River Classification System developed by the National Water Council (NWC), (9.1).

This report presents the river water quality classification for 1990 for monitored river reaches in the Porth, Gluvian and Menalhyl catchments.

2. PORTH, GLUVIAN AND MENALHYL CATCHMENT

The Porth Stream flows over a distance of 12.5 km from its source to the tidal limit, (Appendix 10.1). Water quality was monitored at three locations at approximately monthly intervals.

The Menalhyl Stream flows over a distance of 14 km from its source to the tidal limit, (Appendix 10.1) and was monitored at six sites. Three of these sites were monitored at approximately monthly intervals and three sites were sampled on twenty occasions in 1990 because of no recent water quality data.

The Porthcothan Stream flows over a distance of 7.3 km from its source to the tidal limit, (Appendix 10.1) and was monitored at one site on fifteen occasions in 1990 because of no recent water quality data.

The Harlyn Bay Stream flows over a distance of 6.3 km from its source to its confluence with Harlyn Reservoir, (Appendix 10.1) and was monitored at one site at approximately monthly intervals.

Throughout the Porth, Gluvian and Menalhyl catchment two secondary tributaries of the Porth Stream and three secondary tributaries of the Menalhyl Stream were monitored.

2.1 SECONDARY TRIBUTARIES

The St. Mawgan Stream flows over a distance of 5.2 km from its source to the confluence with the Porth Stream, (Appendix 10.1) and was sampled at one location on eighteen occasions because of no recent water quality data. Monitoring points are located in the lower reaches.

The Mountjoy Stream flows over a distance of 2.3 km from its source to the confluence with the Porth Stream below Porth Reservoir, (Appendix 10.1) and was monitored at one location at approximately monthly intervals.

The Gluvian Stream and Reterth Stream flow over a distance of 9.1 km and 3.1 km respectively before joining the Menalhyl Stream, (Appendix 10.1) and were both sampled at one location on twenty occasions in 1990 because of no recent water quality data.

The Tregatillian Stream flows over a distance of 2.3 km from its source to the confluence with the Menalhyl Stream, (Appendix 10.1) and was sampled at one location on fifteen occasions because of no recent water quality data.

Each sample was analysed for a minimum number of determinands (Appendix 10.2) plus additional determinands based on local knowledge of the catchment. In addition, at selected sites, certain metal analyses were carried out.

The analytical results from all of these samples have been entered into the Water Quality Archive and can be accessed through the Water Act Register, (9.2).

3. NATIONAL WATER COUNCIL'S RIVER CLASSIFICATION SYSTEM

3.1 River Quality Objectives

In 1978 river quality objectives (RQOs) were assigned to all river lengths that were part of the routine monitoring network and to those additional watercourses, which were not part of the routine network, but which received discharges of effluents.

For the majority of watercourses long term objectives were identified based on existing and assumed adequate quality for the long term protection of the watercourse. In a few instances short term objectives were identified but no timetable for the achievement of the associated long term objective was set.

The RQOs currently in use in the Porth, Gluvian and Menalhyl catchments are identified in Appendix 10.1.

3.2 River Quality Classification

River water quality is classified using the National Water Council's (NWC) River Classification System (see Appendix 10.3), which identifies river water quality as being one of five quality classes as shown in Table 1 below:

Table 1 - National Water Council - River Classification System

<u>Class</u>	<u>Description</u>
1A	Good quality
1B	Lesser good quality
2	Fair quality
3	Poor quality
4	Bad quality

Using the NWC system, the classification of river water quality is based on the values of certain determinands as arithmetic means or as 95 percentiles (5 percentiles are used for pH and dissolved oxygen) as indicated in Appendices 10.4.1 and 10.4.2.

The quality classification system incorporates some of the European Inland Fisheries Advisory Commission (EIFAC) criteria (Appendix 10.3) recommended for use by the NWC system.

4. 1990 RIVER WATER QUALITY SURVEY

The 1990 regional classification of river water quality also includes the requirements of the Department of the Environment quinquennial national river quality survey. The objectives for the Department of the Environment 1990 River Quality Survey are given below:

- 1) To carry out a National Classification Survey based on procedures used in the 1985 National Classification Survey, including all regional differences.
- 2) To classify all rivers and canals included in the 1985 National Classification Survey.
- 3) To compare the 1990 Classification with those obtained in 1985.

In addition, those watercourses, which were not part of the 1985 Survey and have been monitored since that date, are included in the 1990 regional classification of river water quality.

5. 1990 RIVER WATER QUALITY CLASSIFICATION

Analytical data collected from monitoring during 1988, 1989 and 1990 were processed through a computerised river water quality classification programme. This resulted in a quality class being assigned to each monitored river reach as indicated in Appendix 10.5.

The quality class for 1990 can be compared against the appropriate River Quality Objective and previous annual quality classes (1985-1989) also based on three years combined data, for each river reach in Appendix 10.5.

The river water classification system used to classify each river length is identical to the system used in 1985 for the Department of the Environment's 1985 River Quality Survey. The determinand classification criteria used to determine the annual quality classes in 1985, subsequent years and for 1990 are indicated in Appendices 10.4 and 10.4.1.

Improvements to this classification system could have been made, particularly in the use of a different suspended solids standard for Class 2 waters. As the National Rivers Authority will be proposing new classification systems to the Secretary of State in the near future, it was decided to classify river lengths in 1990 with the classification used for the 1985-1989 classification period.

The adoption of the revised criteria for suspended solids in Class 2 waters would not have affected the classification of river reaches.

The river quality classes for 1990 of monitored river reaches in the catchment are shown in map form in Appendix 10.6.

The calculated determinand statistics for pH, temperature, dissolved oxygen, biochemical oxygen demand (BOD), total ammonia, un-ionised ammonia, suspended solids, copper and zinc from which the quality class was determined for each river reach, are indicated in Appendix 10.7.

6. NON-COMPLIANCE WITH QUALITY OBJECTIVES

Those monitored river reaches within the catchment, which do not comply with their assigned (RQO), are shown in map form in Appendix 10.8.

Appendix 10.9 indicates the number of samples analysed for each determinand over the period 1988 to 1990 and the number of sample results per determinand, which exceed the determinand quality standard.

For those non-compliant river reaches in the catchment, the extent of exceedance of the calculated determinand statistic with relevant quality standard (represented as a percentage), is indicated in Appendix 10.10.

7. CAUSES OF NON-COMPLIANCE

For those river reaches, which did not comply with their assigned RQOs, the cause of non-compliance (where possible to identify) is indicated in Appendix 10.11.

8. GLOSSARY OF TERMS


RIVER REACH	A segment of water, upstream from sampling point to the next sampling point.
RIVER LENGTH	River distance in kilometres.
RIVER QUALITY OBJECTIVE	That NWC class, which protects the most sensitive use of the water.
95 percentiles	Maximum limits, which must be met for at least 95% of the time.
5 percentiles	Minimum limits, which must be met for at least 95% of the time.
BIOLOGICAL OXYGEN DEMAND (5 day carbonaceous ATU)	A standard test measuring the microbial uptake of oxygen - an estimate of organic pollution.
pH	A scale of acid to alkali.
UN-IONISED AMMONIA	Fraction of ammonia poisonous to fish, NH_3 .
SUSPENDED SOLIDS	Solids removed by filtration or centrifuge under specific conditions.
USER REFERENCE NUMBER	Reference number allocated to a sampling point.
INFERRED STRETCH	Segment of water, which is not monitored and whose water quality classification is assigned from the monitored reach upstream.

9. REFERENCES

Reference

- 9.1 National Water Council (1977). River Water Quality: The Next Stage. Review of Discharge Consent Conditions. London.
- 9.2 Water Act 1989 Section 117
- 9.3 Alabaster J. S. and Lloyd R. Water Quality Criteria for Freshwater Fish, 2nd edition, 1982. Butterworths.

Porth, Gluvian & Menalhyl Catchments River Quality Objectives

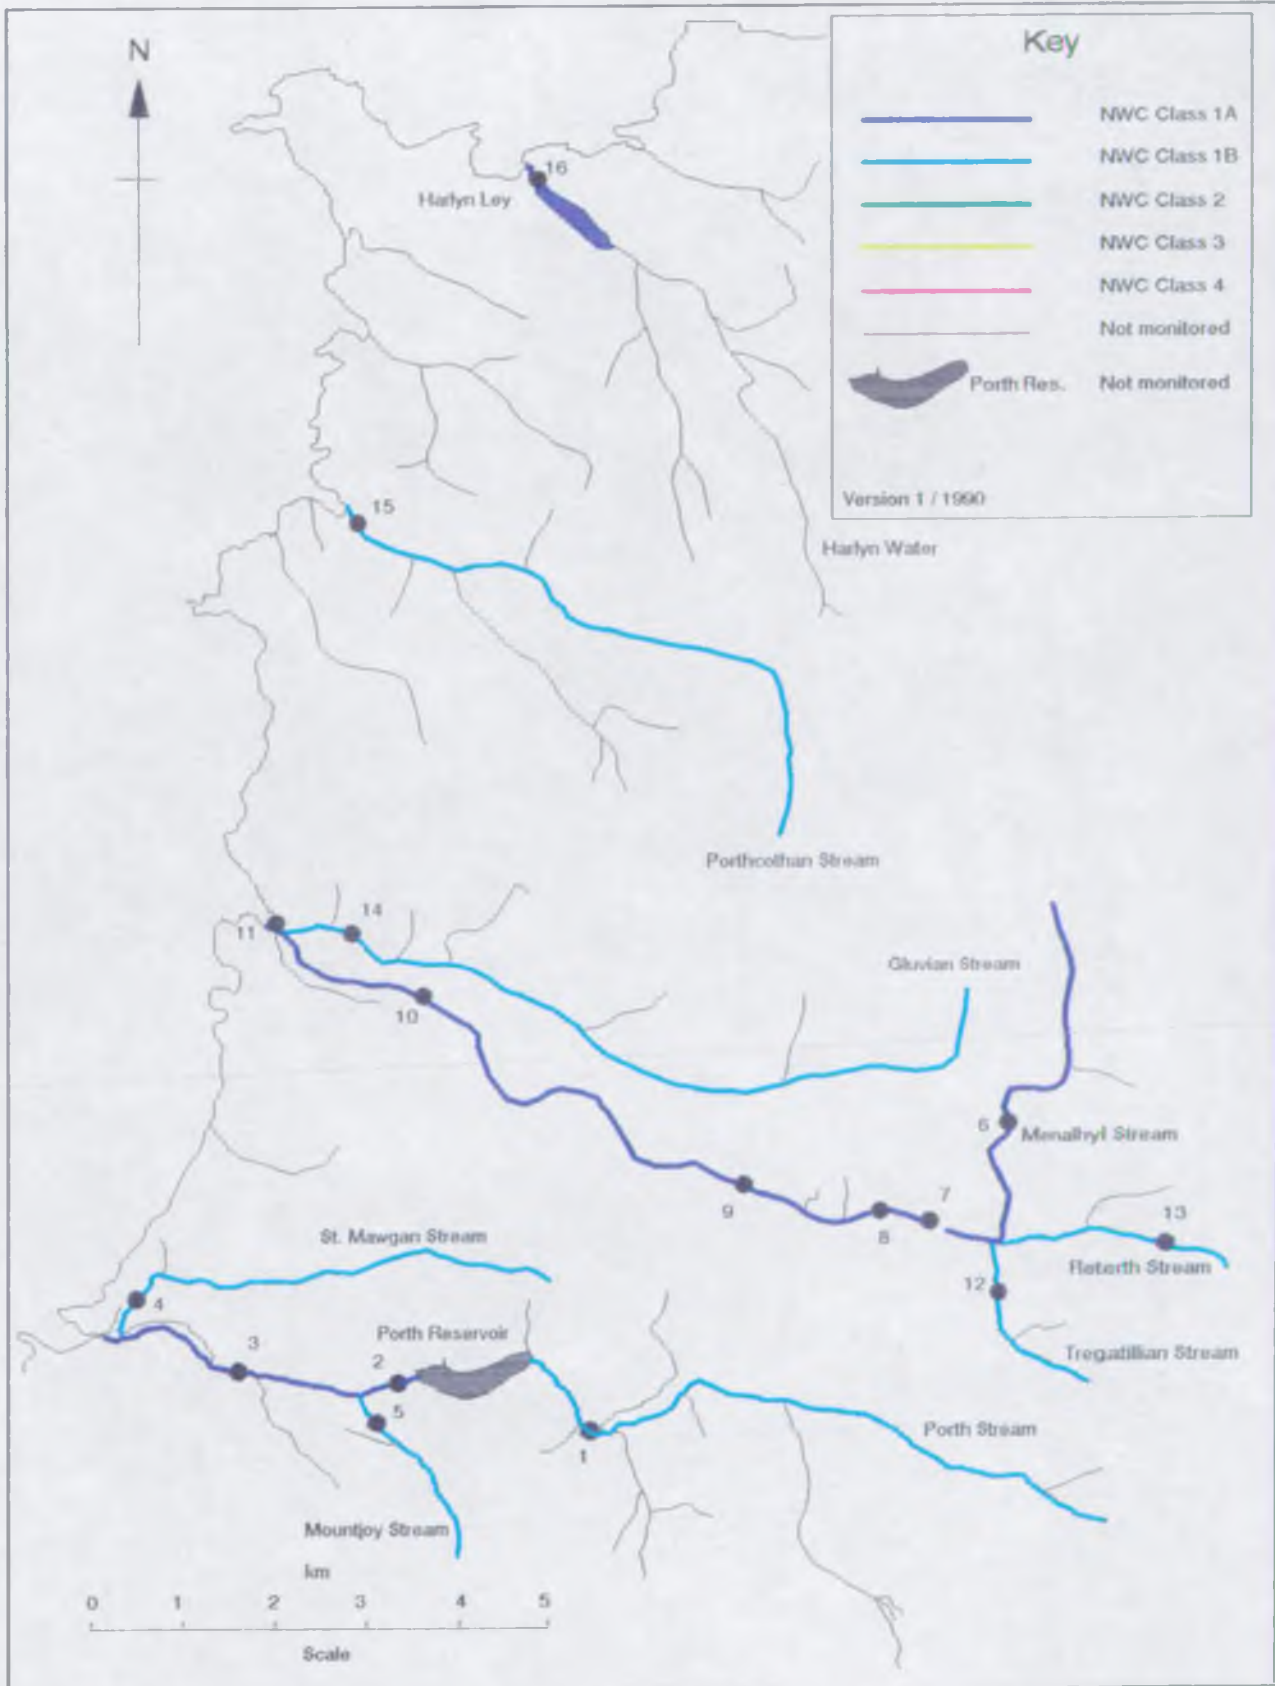

BASIC DETERMINAND ANALYTICAL SUITE FOR ALL CLASSIFIED RIVER SITES

pH as pH Units
Conductivity at 20 C as uS/cm
Water temperature (Cel)
Oxygen dissolved % saturation
Oxygen dissolved as mg/l O
Biochemical oxygen demand (5 day total ATU) as mg/l O
Total organic carbon as mg/l C
Nitrogen ammoniacal as mg/l N
Ammonia un-ionised as mg/l N
Nitrate as mg/l N
Nitrite as mg/l N
Suspended solids at 105 C as mg/l
Total hardness as mg/l CaCO₃
Chloride as mg/l Cl
Orthophosphate (total) as mg/l P
Silicate reactive dissolved as mg/l SiO₂
Sulphate (dissolved) as mg/l SO₄
Sodium (total) as mg/l Na
Potassium (total) as mg/l K
Magnesium (total) as mg/l Mg
Calcium (total) as mg/l Ca
Alkalinity as pH 4.5 as mg/l CaCO₃

NWC RIVER QUALITY CLASSIFICATION SYSTEM

River Class	Quality criteria	Remarks	Current potential uses
	Class limiting criteria (95 percentile)		
1A Good Quality	<ul style="list-style-type: none"> (i) Dissolved oxygen saturation greater than 80% (ii) Biochemical oxygen demand not greater than 3 mg/l (iii) Ammonia not greater than 0.4 mg/l (iv) Where the water is abstracted for drinking water, it complies with requirements for A2* water (v) Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available) 	<ul style="list-style-type: none"> (i) Average BOD probably not greater than 1.5 mg/l (ii) Visible evidence of pollution should be absent 	<ul style="list-style-type: none"> (i) Water of high quality suitable for potable supply abstractions and for all abstractions (ii) Game or other high class fisheries (iii) High amenity value
1B Good Quality	<ul style="list-style-type: none"> (i) DO greater than 80% saturation (ii) BOD not greater than 5 mg/l (iii) Ammonia not greater than 0.9 mg/l (iv) Where water is abstracted for drinking water, it complies with the requirements for A2* water (v) Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available) 	<ul style="list-style-type: none"> (i) Average BOD probably not greater than 2 mg/l (ii) Average ammonia probably not greater than 0.5 mg/l (iii) Visible evidence of pollution should be absent (iv) Waters of high quality which cannot be placed in Class 1A because of the high proportion of high quality effluent present or because of the effect of physical factors such as canalisation, low gradient or eutrophication (v) Class 1A and Class 1B together are essentially the Class 1 of the River Pollution Survey (RPS) 	Water of less high quality than Class 1A but usable for substantially the same purposes
2 Fair Quality	<ul style="list-style-type: none"> (i) DO greater than 40% saturation (ii) BOD not greater than 9 mg/l (iii) Where water is abstracted for drinking water it complies with the requirements for A3* water (iv) Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available) 	<ul style="list-style-type: none"> (i) Average BOD probably not greater than 5 mg/l (ii) Similar to Class 2 of RPS (iii) Water not showing physical signs of pollution other than humic colouration and a little foaming below weirs 	<ul style="list-style-type: none"> (i) Waters suitable for potable supply after advanced treatment (ii) Supporting reasonably good coarse fisheries (iii) Moderate amenity value

Poor Quality	(i) DO greater than 10% saturation (ii) Not likely to be anaerobic (iii) BOD not greater than 17 mg/l. This may not apply if there is a high degree of re-aeration	Similar to Class 3 of RPS	Waters which are polluted to an extent that fish are absent only sporadically present. May be used for low grade industrial abstraction purposes. Considerable potential for further use if cleaned up
-----------------	--	---------------------------	---

4 Bad Quality	Waters which are inferior to Class 3 in terms of dissolved oxygen and likely to be anaerobic at times	Similar to Class 4 of RPS	Waters which are grossly polluted and are likely to cause nuisance
x	DO greater than 10% saturation		Insignificant watercourses and ditches not usable, where the objective is simply to prevent nuisance developing

- Notes
- (a) Under extreme weather conditions (eg flood, drought, freeze-up), or when dominated by plant growth, or by aquatic plant decay, rivers usually in Class 1, 2, and 3 may have BODs and dissolved oxygen levels, or ammonia content outside the stated levels for those Classes. When this occurs the cause should be stated along with analytical results.
 - (b) The BOD determinations refer to 5 day carbonaceous BOD (ATU). Ammonia figures are expressed as NH₄. **
 - (c) In most instances the chemical classification given above will be suitable. However, the basis of the classification is restricted to a finite number of chemical determinands and there may be a few cases where the presence of a chemical substance other than those used in the classification markedly reduces the quality of the water. In such cases, the quality classification of the water should be down-graded on the basis of biota actually present, and the reasons stated.
 - (d) EIFAC (European Inland Fisheries Advisory Commission) limits should be expressed as 95 percentile limits.

EEC category A2 and A3 requirements are those specified in the EEC Council directive of 16 June 1975 concerning the Quality of Surface Water intended for Abstraction of Drinking Water in the Member State.

Ammonia Conversion Factors

(mg NH₄/l to mg N/l)

Class 1A	0.4 mg NH ₄ /l = 0.31 mg N/l
Class 1B	0.9 mg NH ₄ /l = 0.70 mg N/l
	0.5 mg NH ₄ /l = 0.39 mg N/l

NWC RIVER CLASSIFICATION SYSTEM

CRITERIA USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION FOR NON-METALLIC DETERMINANDS

River Class	Quality Criteria
1A	Dissolved oxygen % saturation greater than 80% BOD (ATU) not greater than 3 mg/l O Total ammonia not greater than 0.31 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 21.5 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
1B	Dissolved oxygen % saturation greater than 60% BOD (ATU) not greater than 5 mg/l O Total ammonia not greater than 0.70 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 21.5 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
2	Dissolved oxygen % saturation greater than 40% BOD (ATU) not greater than 9 mg/l O Total ammonia not greater than 1.56 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 28 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
3	Dissolved oxygen % saturation greater than 10% BOD (ATU) not greater than 17 mg/l O
4	Dissolved oxygen % saturation not greater than 10% BOD (ATU) greater than 17 mg/l O

STATISTICS USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION

Determinand	Statistic
Dissolved oxygen	5 percentile
BOD (ATU)	95 percentile
Total ammonia	95 percentile
Non-ionised ammonia	95 percentile
Temperature	95 percentile
pH	5 percentile
Suspended solids	95 percentile
	arithmetic mean

NWC RIVER CLASSIFICATION SYSTEM

CRITERIA USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION FOR METALLIC DETERMINANDS

SOLUBLE COPPER

Total Hardness (mean) mg/l CaCO ₃	Statistic	Soluble Copper*	
		Class 1 ug/l Cu	Class 2
0 - 10	95 percentile	< = 5	> 5
10 - 50	95 percentile	< = 22	> 22
50 - 100	95 percentile	< = 40	> 40
100 - 300	95 percentile	< = 112	> 112

* Total copper is used for classification until sufficient data on soluble copper can be obtained.


TOTAL ZINC

Total Hardness (mean) mg/l CaCO ₃	Statistic	Total Zinc		
		Class 1 ug/l Zn	Class 2	Class 3
0 - 10	95 percentile	< = 30	< = 300	> 300
10 - 50	95 percentile	< = 200	< = 700	> 700
50 - 100	95 percentile	< = 300	< = 1000	> 1000
100 - 300	95 percentile	< = 500	< = 2000	> 2000

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION
 1990 RIVER WATER QUALITY CLASSIFICATION
 CATCHMENT: PORTH, GLUVIAN AND MENALHYL (27)

1990 Map Position Number	River	Reach upstream of	User Reference Number	National Grid Reference	Reach Length (km)	Distance from source (km)	River Quality Objective	85 NWC Class	86 NWC Class	87 NWC Class	88 NWC Class	89 NWC Class	90 NWC Class	
1	PORTH STREAM	TREGOOSE FORD BRIDGE	R25A004	SW 8833 6157	6.6	6.6	1B	2	1B	1B	1B	1B	1B	
	PORTH STREAM	INFLOW, PORTH RES. (INFERRED STRETCH)			1.2	7.8	1B	2	2	2	1B	3	1B	
	PORTH STREAM	PORTH RESERVOIR (UNMONITORED STRETCH)			1.1	8.9	1B	2	2	2	1B	3		
2	PORTH STREAM	MELANCOOSE	R25A009	SW 8615 6212	0.2	9.1	1A	2	2	2	1B	3	3	
	3	PORTH STREAM	RIALTON BRIDGE	R25A005	SW 8468 6230	1.6	10.7	1A	2	2	2	1B	3	3
PORTH STREAM		NORMAL TIDAL LIMIT (INFERRED STRETCH)	1.8			12.5	1A	2	2	2	1B	3	3	
4	ST. MANGAN STREAM	MEIPSIDERRY	R25A013	SW 8373 6327	4.8	4.8	1B						1B	
	ST. MANGAN STREAM	PORTH STREAM CONFL. (INFERRED STRETCH)			0.4	5.2	1B							1B
5	MOUNTJOY STREAM	TREWASSICK BRIDGE	R25A015	SW 8601 6182	2.0	2.0	1B						1A	
	MOUNTJOY STREAM	PORTH STREAM CONFL. (INFERRED STRETCH)			0.3	2.3	1B							1A
6	MENALHYL	TREGAMERE	R25A014	SW 9270 6457	3.9	3.9	1A	1B	1B	1B	1B	1B	1B	
7	MENALHYL	THE RETREAT	R25A012	SW 9180 6396	1.9	5.8	1A	1B	1B	1B	1B	1B	1A	
8	MENALHYL	ST. COLUMB MAJOR BRIDGE	R25A001	SW 9141 6399	0.4	6.2	1A	1B	1B	1B	1B	1B	1B	
9	MENALHYL	BELOW ST. COLUMB STW	R25A011	SW 9041 6413	1.0	7.2	1A	2	2	1B	1B	2	3	
10	MENALHYL	ST. MANGAN BRIDGE	R25A002	SW 8726 6600	4.0	11.2	1A	2	2	1B	1B	2	2	
11	MENALHYL	MANGAN PORTH BRIDGE	R25A003	SW 8493 6716	2.8	14.0	1A	1B	2	2	2	2	2	
12	TREGATILLIAN STR.	TREGATILLIAN	R25A016	SW 9270 6323	1.8	1.8	1B						2	
	TREGATILLIAN STR.	MENALHYL CONFLUENCE (INFERRED STRETCH)			0.5	2.3	1B							2
13	RETERTH STREAM	RETERTH	R25A017	SW 9436 6357	1.2	1.2	1B						1A	
	RETERTH STREAM	MENALHYL CONFLUENCE (INFERRED STRETCH)			1.9	3.1	1B							1A
14	GLUVIAN STREAM	GLUVIAN	R25A018	SW 8621 6692	8.0	8.0	1B	1B					1B	
	GLUVIAN STREAM	MENALHYL CONFLUENCE (INFERRED STRETCH)			1.1	9.1	1B	1B						1B
15	PORTHCOATHAN STREAM	PORTHCOATHAN ROADBRIDGE	R25A008	SW 8594 7208	7.2	7.2	1B	1B	1B				2	
	PORTHCOATHAN STREAM	NORMAL TIDAL LIMIT (INFERRED STRETCH)			0.1	7.3	1B	1B	1B					1B
16	HARLYN WATER	INFLOW, HARLYN LEY (UNMON. STRETCH)	R25A007	SW 8787 7539	5.4	5.4	1A	1B	1B					
	HARLYN WATER	HARLYN BRIDGE			0.8	6.2	1A	1B	1B					3
	HARLYN WATER	NORMAL TIDAL LIMIT (INFERRED STRETCH)			0.1	6.3	1A	1B	1B					3


Porth, Gluvian & Menalhyl Catchments Water Quality - 1990

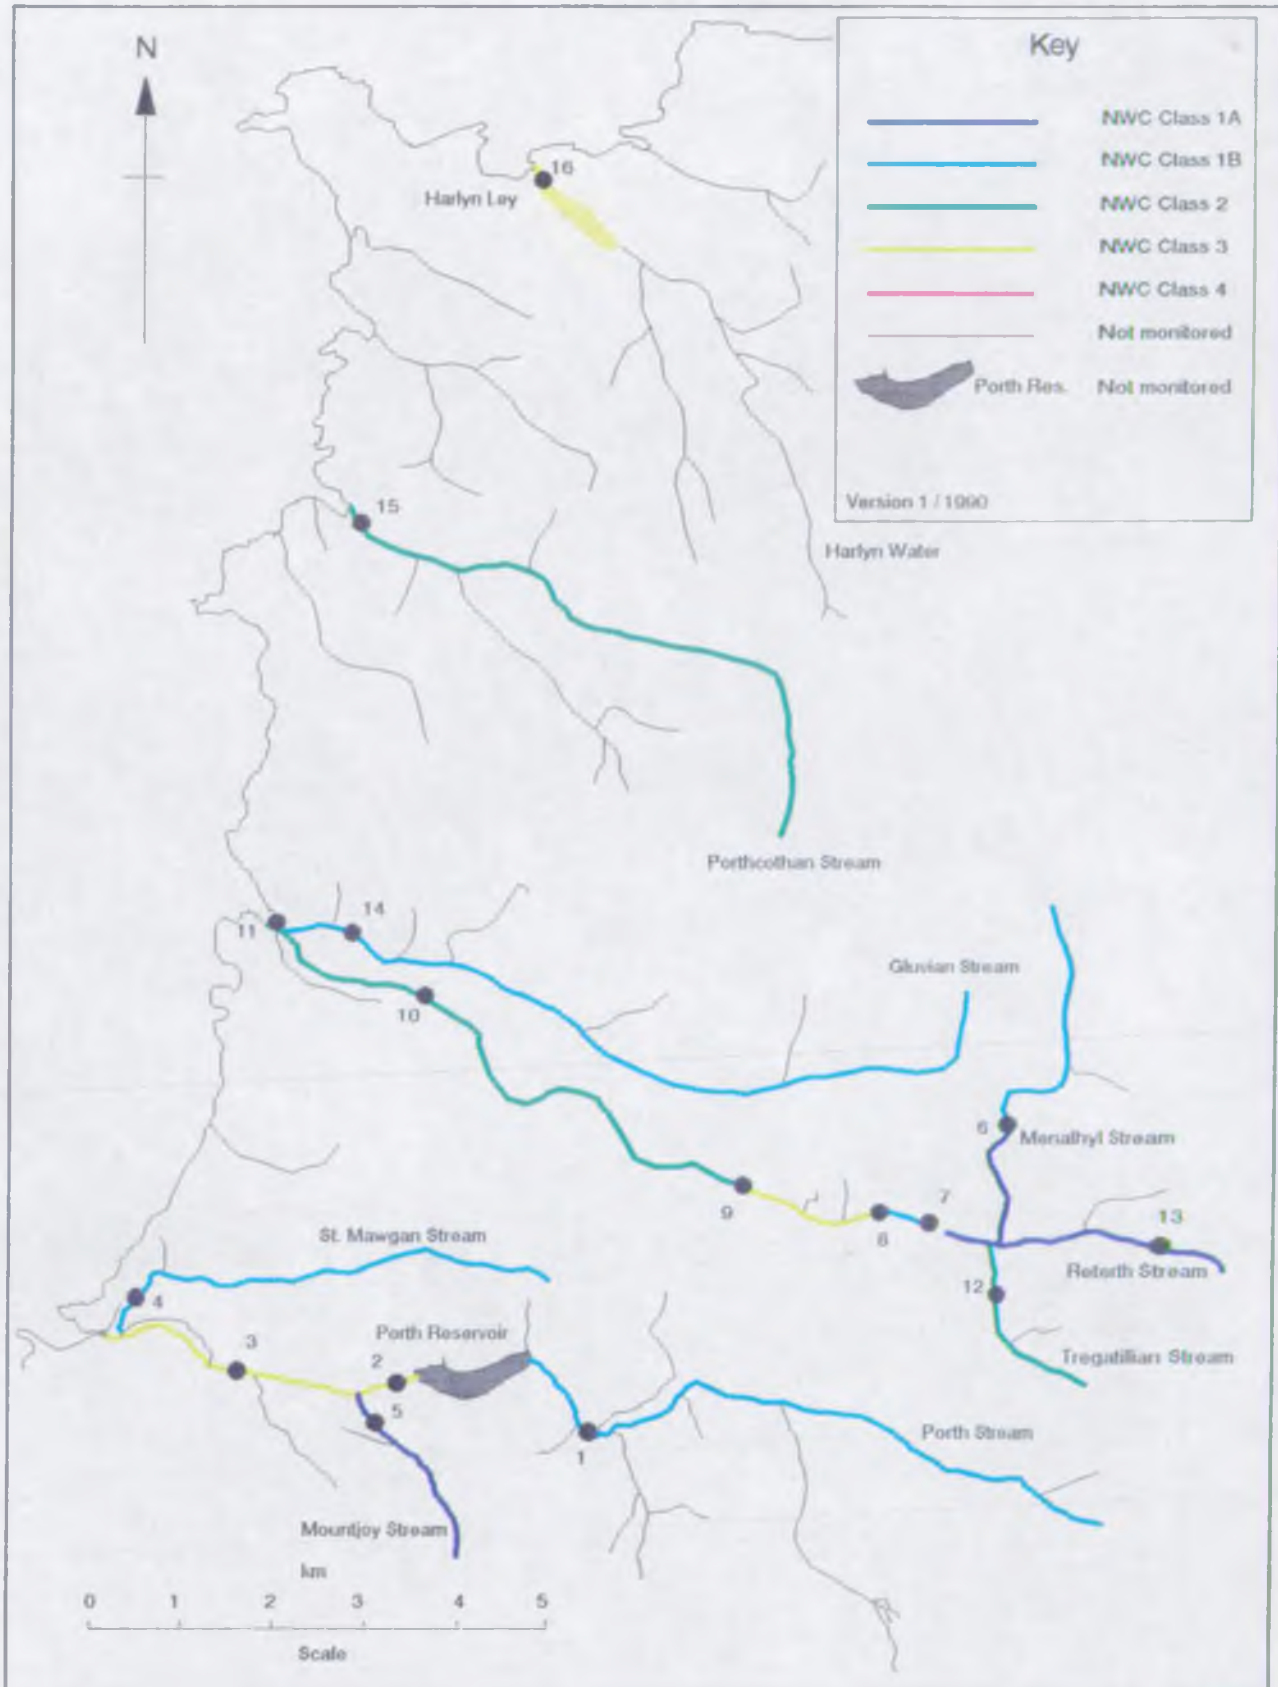

NATIONAL RIVERS AUTHORITY - SOUTH WEST DISTRICT
 1990 RIVER WATER QUALITY CLASSIFICATION
 CALCULATED DETERMINED STATISTICS USED FOR QUALITY ASSESSMENT
 OCCUPANT: FORTH, GILVING AND MENNIEL (27)

River	Reach upstream of	User Ref. Number	90 BNC Class	Calculated Determined Statistics used for Quality Assessment																			
				pH Lower Class 5tile		pH Upper Class 95tile		Temperature Class 95tile		DO (%) Class 5tile		BOD (MBU) Class 95tile		Total Ammonia Class 95tile		Union. Ammonia Class 95tile		S.Solids Class Mean		Total Copper Class 95tile		Total Zinc Class 95tile	
FORTH STREAM	TRIGLOOSE FORD BRIDGE	BZ5M004	1B	1A	7.0	1A	7.9	1A	17.8	1B	67.4	1B	3.4	1B	0.325	1A	0.010	1A	14.2	1A	14.0	1A	148.0
FORTH STREAM	MELANCKOGE	BZ5M009	3	1A	7.0	3	9.7	1A	20.0	1B	76.0	1B	3.7	1B	0.600	3	0.040	1A	19.2	1A	8.0	1A	93.0
FORTH STREAM	RIMBURN BRIDGE	BZ5M005	3	1A	7.3	1A	8.8	1A	18.5	1B	76.0	1B	4.9	3	2.189	3	0.030	1A	11.8	1A	11.3	1A	39.5
ST. MAGNUS STREAM	MEIRSIDGEE	BZ5M013	1B	1A	7.1	1A	8.2	1A	19.8	1B	69.0	1A	2.6	1A	0.130	1A	0.010	1A	9.1	1A	12.0	1A	36.0
MURDOCK STREAM	TRININGSICK BRIDGE	BZ5M015	1A	1A	7.0	1A	8.1	1A	18.8	1A	86.0	1A	2.3	1A	0.150	1A	0.010	1A	9.6	1A	3.0	1A	8.0
MENNIEL	TRIGWANE	BZ5M014	1B	1A	6.9	1A	7.8	1A	17.4	1B	80.0	1A	2.4	1A	0.080	1A	0.010	1A	22.3	1A	9.0	1A	50.0
MENNIEL	THE BURNHUT	BZ5M012	1A	1A	6.8	1A	8.5	1A	17.9	1A	80.4	1A	2.1	1A	0.127	1A	0.010	1A	14.1	1A	11.0	1A	66.0
MENNIEL	ST. COLMB MAJOR BRIDGE	BZ5M001	1B	1A	6.6	1A	8.0	1A	15.9	1B	69.2	1B	3.4	1B	0.418	1A	0.010	1A	12.1	1A	14.3	1A	28.3
MENNIEL	BELOW ST. COLMB STW	BZ5M011	3	1A	6.8	1A	8.0	1A	18.0	1B	69.1	3	9.8	2	1.397	1A	0.010	1A	14.7	1A	12.0	1A	30.0
MENNIEL	ST. MAGNUS BRIDGE	BZ5M002	2	1A	6.3	1A	7.8	1A	16.8	1B	77.2	2	5.2	1A	0.304	1A	0.010	1A	12.5	1A	13.6	1A	27.7
MENNIEL	DWIGN FORTH BRIDGE	BZ5M003	2	1A	6.8	1A	7.9	1A	17.3	2	57.5	1B	3.9	2	0.833	1A	0.010	1A	12.5	2	79.0	1A	62.0
TRIGWILLAN STR.	TRIGWILLAN	BZ5M016	2	1A	6.6	1A	7.5	1A	16.0	1B	78.0	1B	3.1	2	1.000	1A	0.010	1A	8.0	1A	7.0	1A	19.0
BEDERON STREAM	BEVERON	BZ5M017	1A	1A	6.1	1A	7.7	1A	14.0	1A	87.0	1A	1.8	1A	0.040	1A	0.010	1A	3.7	1A	22.0	1A	19.0
GILVING STREAM	GILVING	BZ5M018	1B	1A	7.0	1A	7.9	1A	15.7	1B	74.3	1B	4.2	1A	0.155	1A	0.010	1A	8.3	1A	8.0	1A	76.0
TRIGKILDEEN STREAM	TRIGKILDEEN FORD BRIDGE	BZ5M008	2	1A	7.4	1A	8.0	1A	16.4	1B	65.1	1A	2.7	1A	0.134	1A	0.010	1A	10.8	1A	9.0	2	920.0
BURNAN WATER	BURNAN BRIDGE	BZ5M007	3	1A	7.4	1A	8.1	1A	20.5	3	31.0	3	13.0	2	1.500	3	0.030	1A	11.0	1A	4.0	1A	27.0

Porth, Gluvian & Menalhyl Catchments Compliance - 1990

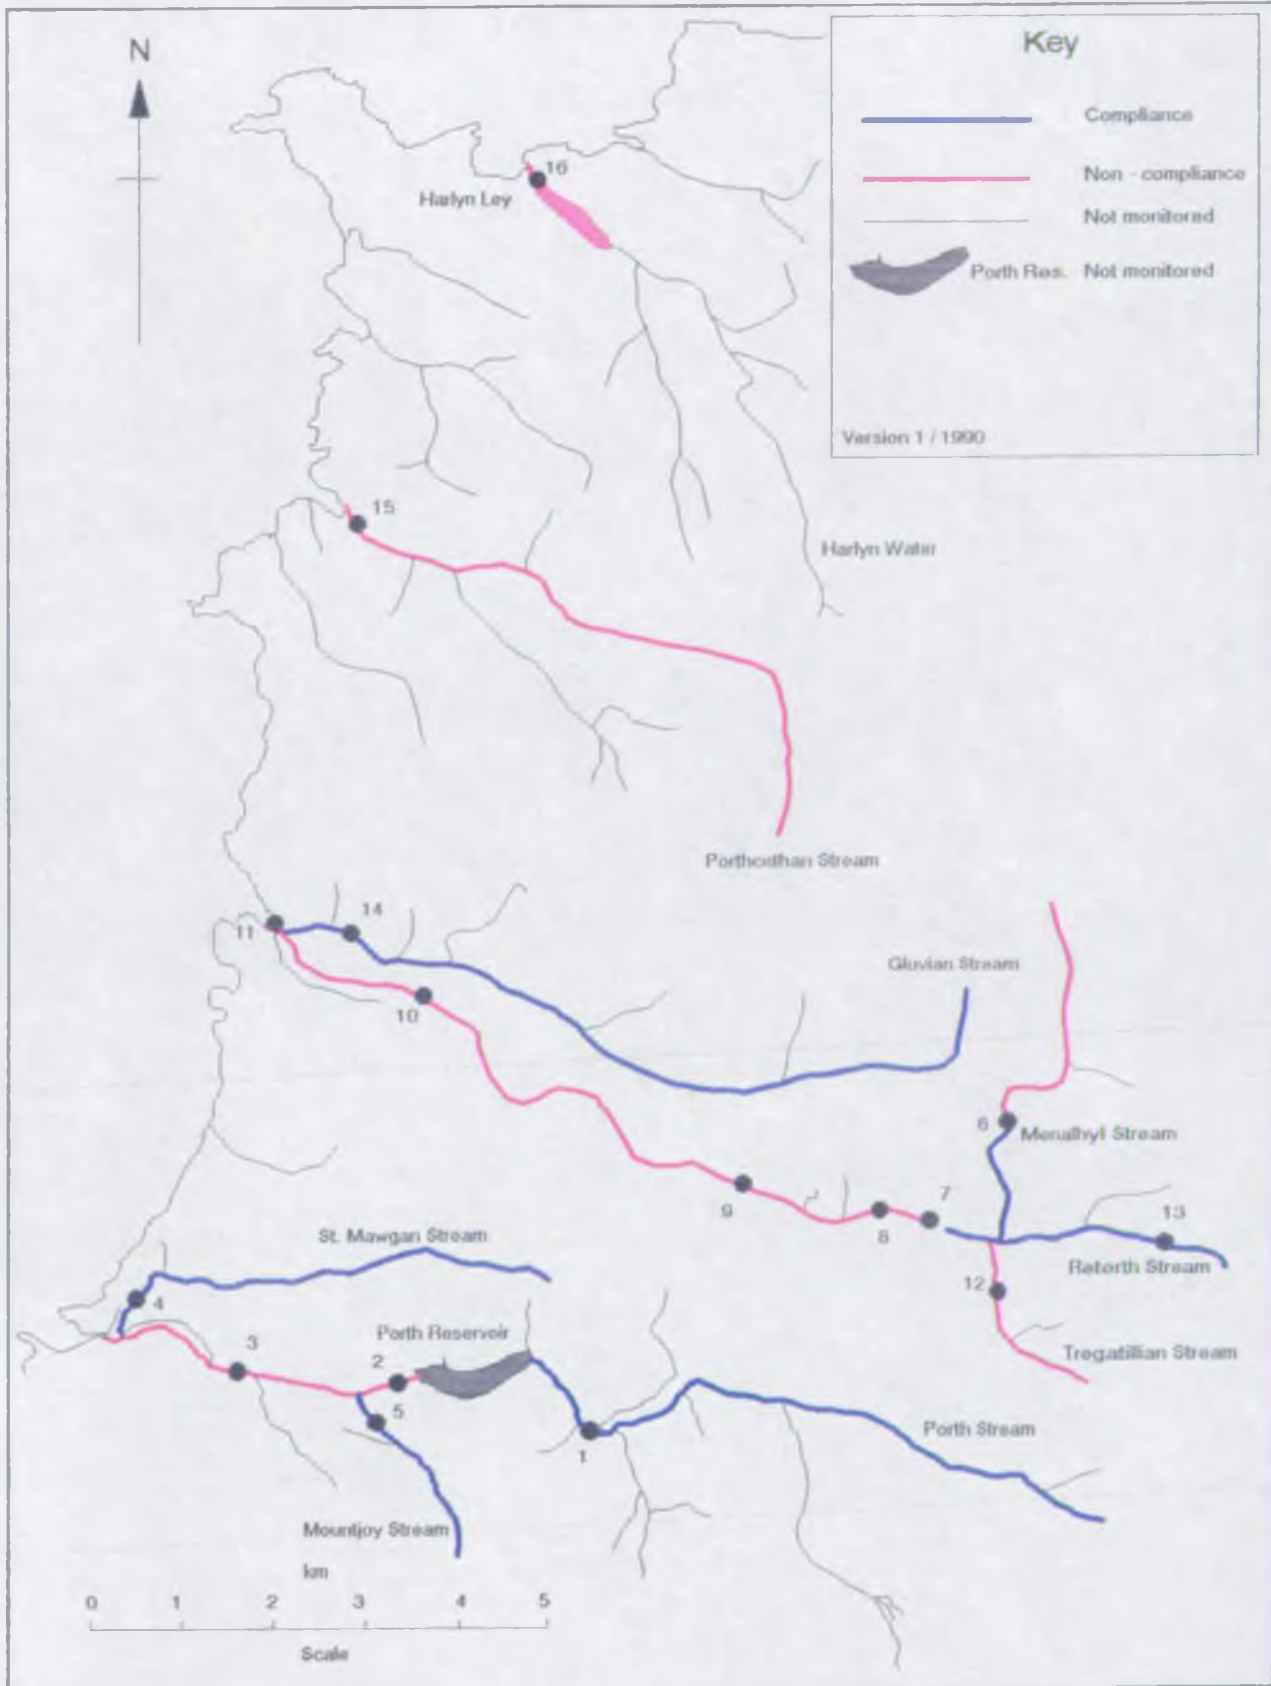

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION

1990 RIVER WATER QUALITY CLASSIFICATION

NUMBER OF SAMPLES (N) AND NUMBER OF SAMPLES EXCEEDING QUALITY STANDARD (F)

CATCHMENT: FORTH, GLUWIAN AND MENALHIL (27)

River	Reach upstream of	Usec Ref. Number	pH Lower		pH Upper		Temperature		DO (%)		BOD (ATU)		Total Ammonia		Union. Ammonia		S.Solids		Total Copper		Total Zinc	
			N	F	N	F	N	F	N	F	N	F	N	F	N	F	N	F	N	F	N	F
FORTH STREAM	MELANDOSE FORD BRIDGE	R25A004	28	-	28	-	27	-	27	-	28	-	28	-	26	-	28	2	19	-	19	-
FORTH STREAM	MELANDOSE	R25A009	19	-	19	3	19	-	19	2	19	1	19	1	18	3	19	4	19	-	19	-
FORTH STREAM	RIALION BRIDGE	R25A005	30	-	30	-	29	-	29	2	30	5	30	2	29	1	30	2	22	-	22	-
ST. MWGAN STREAM	WHIPSIDERY	R25A013	38	-	38	-	38	-	38	-	38	-	38	-	38	-	38	2	24	-	24	-
MOUNDOY STREAM	TRENGSUCK BRIDGE	R25A015	36	-	36	-	36	-	36	-	36	-	36	-	36	-	36	-	24	-	24	-
MENALHIL	TRENGMERE	R25A014	38	-	38	-	38	-	38	-	38	-	38	-	38	-	38	10	24	-	24	-
MENALHIL	THE REDHEAT	R25A012	40	-	40	-	40	-	40	-	40	-	40	-	38	-	40	4	24	-	24	-
MENALHIL	ST. COLLMB MAJOR BRIDGE	R25A001	27	-	27	-	27	-	27	4	27	1	27	1	25	-	27	3	26	-	26	-
MENALHIL	BELOW ST. COLLMB STW	R25A011	21	-	21	-	21	-	21	2	21	7	21	8	21	-	21	2	13	-	13	-
MENALHIL	ST. MWGAN BRIDGE	R25A002	27	-	27	-	27	-	27	3	27	5	27	1	27	-	27	4	26	-	26	-
MENALHIL	MWGAN FORTH BRIDGE	R25A003	30	-	30	-	29	-	29	8	30	4	30	3	28	-	30	4	29	1	29	-
TRENGWILLIAN STR.	TRENGWILLIAN	R25A016	19	-	19	-	19	-	19	-	19	-	19	2	18	-	19	1	15	-	15	-
REYDRIH STREAM	REYDRIH	R25A017	40	-	40	-	40	-	40	-	40	-	40	-	36	-	40	-	24	-	24	-
GLUWIAN STREAM	GLUWIAN	R25A018	42	-	42	-	40	-	40	-	42	-	42	-	38	-	42	2	26	-	26	-
FORTHCOATHAN STREAM	FORTHCOATHAN FORDBRIDGE	R25A008	21	-	21	-	20	-	20	-	21	-	21	-	20	-	21	2	17	-	17	1
HARLEN WIDER	HARLEN BRIDGE	R25A007	19	-	19	-	19	-	19	13	19	7	19	2	17	1	19	2	15	-	15	-

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION
 1990 RIVER WATER QUALITY CLASSIFICATION
 PERCENTAGE EXCEEDENCE OF DETERMINAND STATISTICS FROM QUALITY STANDARDS
 CATCHMENT: PORTH, GLUVIAN AND MENALHYL (27)

River	Reach upstream of	User Ref. Number	PERCENTAGE EXCEEDENCE OF STATISTIC FROM QUALITY STANDARD									
			pH Lower	pH Upper	Temperature	DO (%)	BOD (ATU)	Total Ammonia	Un-ionised Ammonia	Suspended Solids	Total Copper	Total Zinc
PORTH STREAM	TREGOOSE FORD BRIDGE	R25A004	-	-	-	-	-	-	-	-	-	-
PORTH STREAM	MELANCOOSE	R25A009	-	8	-	5	23	94	90	-	-	-
PORTH STREAM	RIALTON BRIDGE	R25A005	-	-	-	5	62	606	43	-	-	-
ST. MANGAN STREAM	WHIPSIDERRY	R25A013	-	-	-	-	-	-	-	-	-	-
MOUNTJOY STREAM	TREWASSICK BRIDGE	R25A015	-	-	-	-	-	-	-	-	-	-
MENALHYL	TREGAMERE	R25A014	-	-	-	-	-	-	-	-	-	-
MENALHYL	THE RETREAT	R25A012	-	-	-	-	-	-	-	-	-	-
MENALHYL	ST. COLUMB MAJOR BRIDGE	R25A001	-	-	-	14	12	35	-	-	-	-
MENALHYL	BELOW ST. COLUMB STW	R25A011	-	-	-	14	226	351	-	-	-	-
MENALHYL	ST. MANGAN BRIDGE	R25A002	-	-	-	4	73	-	-	-	-	-
MENALHYL	MANGAN PORTH BRIDGE	R25A003	-	-	-	28	29	169	-	-	83	-
TREGATILLIAN STREAM	TREGATILLIAN	R25A016	-	-	-	-	-	43	-	-	-	-
RETERTH STREAM	RETERTH	R25A017	-	-	-	-	-	-	-	-	-	-
GLUVIAN STREAM	GLUVIAN	R25A018	-	-	-	-	-	-	-	-	-	-
PORTHCOTHAN STREAM	PORTHCOTHAN ROADERIDGE	R25A008	-	-	-	-	-	-	-	-	-	84
HARLYN WATER	HARLYN BRIDGE	R25A007	-	-	-	61	333	384	43	-	-	-

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION
 IDENTIFICATION OF POSSIBLE CAUSES OF NON-COMPLIANCE WITH RQO
 CATCHMENT: PORTH, GLUVIAN AND MENALHYL (27)

1990 Map Position Number	River	Reach upstream of	User Reference Number
2	PORTH STREAM	MELANCOOSE	R25A009
3	PORTH STREAM	RIALTON BRIDGE	R25A005
6	MENALHYL	TREGAMERE	R25A014
8	MENALHYL	ST. COLUMB MAJOR BRIDGE	R25A001
9	MENALHYL	* BELOW ST. COLUMB STW	R25A011
10	MENALHYL	ST. MAWGAN BRIDGE	R25A002
11	MENALHYL	MAWGAN PORTH BRIDGE	R25A003
12	TREGATILLIAN STR.	TREGATILLIAN	R25A016
15	PORHCOTHAN STREAM	PORHCOTHAN ROADBRIDGE	R25A008
16	HARLYN WATER	HARLYN BRIDGE	R25A007

Reach Length (km)	Possible causes of non-compliance
0.2	BLUE-GREEN ALGAE, FARMING ACTIVITIES
1.6	EUTROPHICATION, IMPOUNDMENT UP-STREAM, FARMING ACTIVITIES
3.9	FISH FARM DISCHARGE, LAND RUN-OFF
0.4	LAND RUN-OFF, STORM OVERFLOWS, FARMING ACTIVITIES
1.0	LAND RUN-OFF, SEWAGE TREATMENT WORKS
4.0	LAND RUN-OFF, SEWAGE TREATMENT WORKS
2.8	CANALISATION, SEWAGE TREATMENT WORKS, STORM OVERFLOW, FARMING ACTIVITIES
1.8	SEWAGE TREATMENT WORKS, FARMING ACTIVITIES
7.2	MINING
0.8	UP-STREAM ABSTRACTION, DROUGHT, SEPTIC TANK