

# Environmental Protection Report

## River Gannel Catchment River Water Quality Classification 1991

April 1992

WQP/92/0028

Author: B L Milford  
Water Quality Planner



**NRA**

*National Rivers Authority*

*South West Region*

C V M Davies  
Environmental Protection Manager

## ACKNOWLEDGEMENTS

The Water Quality Planner acknowledges the substantial contributions made by the following staff:

R Broome - Co-ordinator and Editor  
Freshwater Planning - Production of Maps  
C McCarthy - Administration and report compilation  
A Gurney - Statistical Schedule production

Thanks are extended to A. Burghes of Moonsoft, Exeter for computer support.

---

Suggestions for improvements that could be incorporated in the production of the next Classification report would be welcomed.

---

Further enquiries regarding the content of these reports should be addressed to:

Freshwater Officer,  
National Rivers Authority,  
Manley House,  
Kestrel Way,  
EXETER,  
Devon                      EX2 7LQ

ENVIRONMENT AGENCY



110226

# RIVER WATER QUALITY IN THE RIVER GANNEL CATCHMENT

## LIST OF CONTENTS


	Page No.
1 Introduction	1
2 River Gannel Catchment	1
3 National Water Council's River Classification System	2
4 1991 River Water Quality Classification	2
5 Non-compliance with Quality Objectives	3
6 Glossary of Terms	4
7 References	4
8 Appendices:	
8.1 River Quality Objectives including Monitoring points - map format	
8.2 Basic Determinand Analytical Suite	
8.3 National Water Council (NWC) River Classification System	
8.4 NWC Criteria for Non-Metallic Determinands - Regional Variation	
8.4.1 NWC Criteria for Metallic Determinands - Regional Variation	
8.5 1991 River Water Quality Classification - tabular format	
8.6 1991 River Water Quality Classification - map format	
8.7 Calculated Determinand Statistics used for Quality Assessment - tabular format	
8.8 Compliant/Non-Compliant River Reaches - map format	
8.9 Number of Samples Results exceeding quality standards - tabular format	
8.10 Percentage Exceedance of Determinand Statistics from Quality Standard - tabular format	

# National Rivers Authority South West Region



**NRA**

*National Rivers Authority  
South West Region*

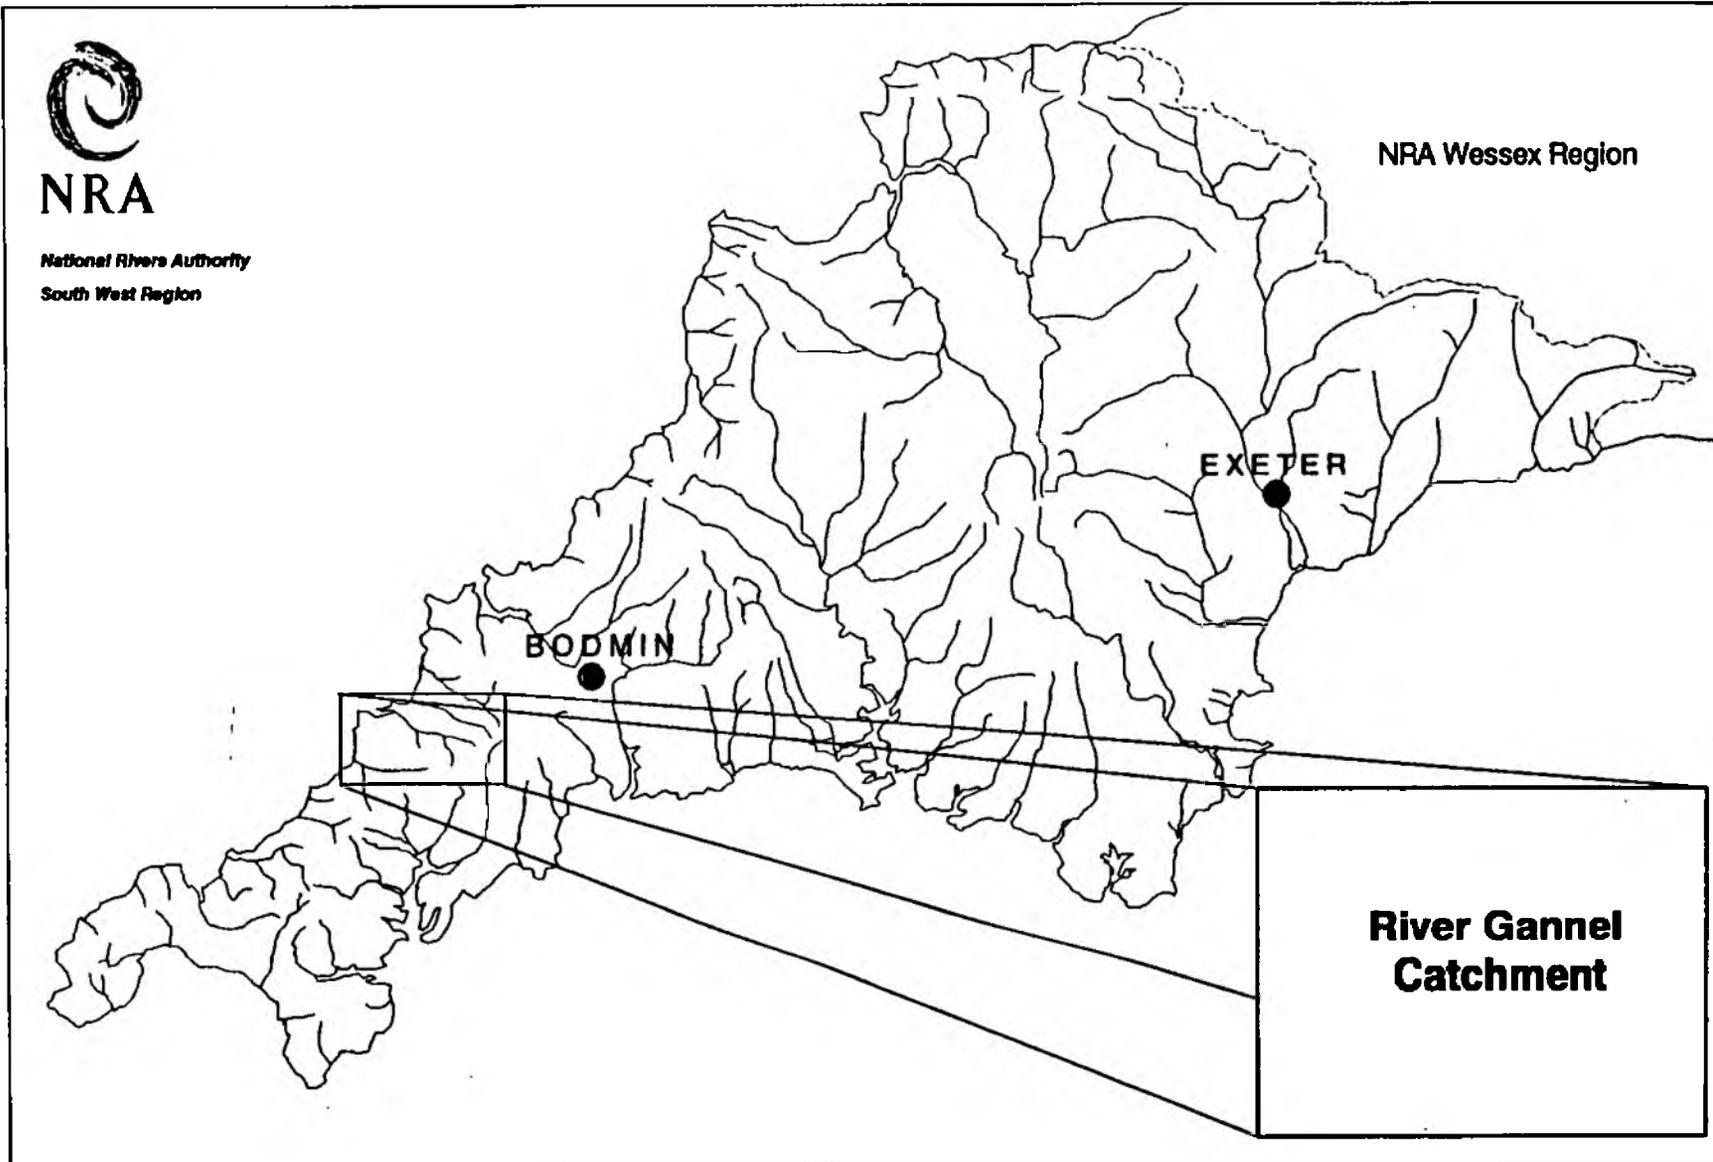

NRA Wessex Region

EXETER

BODMIN

**River Gannel  
Catchment**

**River Gannel Catchment**

## 1. INTRODUCTION

Monitoring to assess the quality of river waters is undertaken in thirty-four catchments within the region. As part of this monitoring programme samples are collected routinely from selected monitoring points at a pre-determined frequency per year, usually twelve spaced at monthly intervals. Each monitoring point provides data for the water quality of a river reach (in kilometres) upstream of the monitoring point.

Each water sample collected from each monitoring point is analysed for a range of chemical and physical constituents or properties known as determinands. The analytical results for each sample are entered into a computer database called the Water Quality Archive.

Selected data are accessed from the Archive so that the quality of each river reach can be determined based on a River Classification System developed by the National Water Council (NWC), (7.1).

This report presents the river water quality classification for 1991 for monitored river reaches in the River Gannel catchment.

## 2. RIVER GANNEL CATCHMENT

The River Gannel flows over a distance of 10.5 km from its source to the tidal limit, (Appendix 8.1). Water quality was monitored at four locations on the main river at approximately monthly intervals.

Throughout the Gannel catchment two secondary tributaries and one tertiary tributary were monitored.

### 2.1 SECONDARY TRIBUTARIES

The Newlyn East Stream flows over a distance of 3.7 km from its source to the confluence with the River Gannel, (Appendix 8.1) and was monitored at one location at approximately monthly intervals.

The Benny Stream flows over a distance of 6 km from its source to the confluence with the River Gannel, (Appendix 8.1), and was monitored at two locations at approximately monthly intervals.

Monitoring points are all located in the lower reaches.

### 2.2 TERTIARY TRIBUTARY

The East Wheal Rose Stream flows over a distance of 4.3 km from its source to the confluence with the Benny Stream, (Appendix 8.1) and was monitored at three sites at approximately monthly intervals.

Each sample was analysed for a minimum number of determinands (Appendix 8.2) plus additional determinands based on local knowledge of the catchment. In addition, at selected sites, certain metal analyses were carried out.

The analytical results from all of these samples have been entered into the Water Quality Archive and can be accessed through the Water Resources Act Register, (7.2).

### 3. NATIONAL WATER COUNCIL'S RIVER CLASSIFICATION SYSTEM

#### 3.1 River Quality Objectives

In 1978 River Quality Objectives (RQOs) were assigned to all river lengths that were part of the routine monitoring network and to those additional watercourses, which were not part of the routine network, but which received discharges of effluents.

For the majority of watercourses long term objectives were identified based on existing and assumed adequate quality for the long term protection of the watercourse. In a few instances short term objectives were identified but no timetable for the achievement of the associated long term objective was set.

The RQOs currently in use in the River Gannel catchment are identified in Appendix 8.1.

#### 3.2 River Quality Classification

River water quality is classified using the National Water Council's (NWC) River Classification System (see Appendix 8.3), which identifies river water quality as being one of five quality classes as shown in Table 1 below:

Table 1 - National Water Council - River Classification System

<u>Class</u>	<u>Description</u>
1A	Good quality
1B	Lesser good quality
2	Fair quality
3	Poor quality
4	Bad quality

Using the NWC system, the classification of river water quality is based on the values of certain determinands as arithmetic means or as 95 percentiles (5 percentiles are used for pH and dissolved oxygen) as indicated in Appendices 8.4 and 8.4.1.

The quality classification system incorporates some of the European Inland Fisheries Advisory Commission (EIFAC) criteria (Appendix 8.3) recommended for use by the NWC system.

### 4. 1991 RIVER WATER QUALITY CLASSIFICATION

Analytical data collected from monitoring during 1989, 1990 and 1991 were processed through a computerised river water quality classification programme. This resulted in a quality class being assigned to each monitored river reach as indicated in Appendix 8.5.

The quality class for 1991 can be compared against the appropriate River Quality Objective and previous annual quality classes (1985-1990) also based on three years combined data, for each river reach in Appendix 8.5.

The river water classification system used to classify each river length is identical to the system used both in 1985 and 1990 for the Department of the Environment's Quinquennial River Quality Surveys. The determinand classification criteria used to determine the annual quality classes in 1985, subsequent years and for 1991 are indicated in Appendices 8.4 and 8.4.1.

The river quality classes for 1991 of monitored river reaches in the catchment are shown in map form in Appendix 8.6.

The calculated determinand statistics for pH, temperature, dissolved oxygen, biochemical oxygen demand (BOD), total ammonia, un-ionised ammonia, suspended solids, copper and zinc from which the quality class was determined for each river reach, are indicated in Appendix 8.7.

#### 5. NON-COMPLIANCE WITH QUALITY OBJECTIVES

Those monitored river reaches within the catchment, which do not comply with their assigned (RQO), are shown in map form in Appendix 8.8.

Appendix 8.9 indicates the number of samples analysed for each determinand over the period 1989 to 1991 and the number of sample results per determinand, which exceed the determinand quality standard.

For those non-compliant river reaches in the catchment, the extent of exceedance of the calculated determinand statistic with the relevant quality standard (represented as a percentage), is indicated in Appendix 8.10.

## 6. GLOSSARY OF TERMS


RIVER REACH	A segment of water, upstream from sampling point to the next sampling point.
RIVER LENGTH	River distance in kilometres.
RIVER QUALITY OBJECTIVE	That NWC class, which protects the most sensitive use of the water.
95 percentiles	Maximum limits, which must be met for at least 95% of the time.
5 percentiles	Minimum limits, which must be met for at least 95% of the time.
BIOLOGICAL OXYGEN DEMAND (5 day carbonaceous ATU)	A standard test measuring the microbial uptake of oxygen - an estimate of organic pollution.
pH	A scale of acid to alkali.
UN-IONISED AMMONIA	Fraction of ammonia poisonous to fish, $\text{NH}^3$ .
SUSPENDED SOLIDS	Solids removed by filtration or centrifuge under specific conditions.
USER REFERENCE NUMBER	Reference number allocated to a sampling point.
INFERRED STRETCH	Segment of water, which is not monitored and whose water quality classification is assigned from the monitored reach upstream.

## 7. REFERENCES

### Reference

- 7.1 National Water Council (1977). River Water Quality: The Next Stage. Review of Discharge Consent Conditions. London.
- 7.2 Water Resources Act 1991 Section 190.
- 7.3 Alabaster J. S. and Lloyd R. Water Quality Criteria for Freshwater Fish, 2nd edition, 1982. Butterworths.

# Gannel Catchment River Quality Objectives

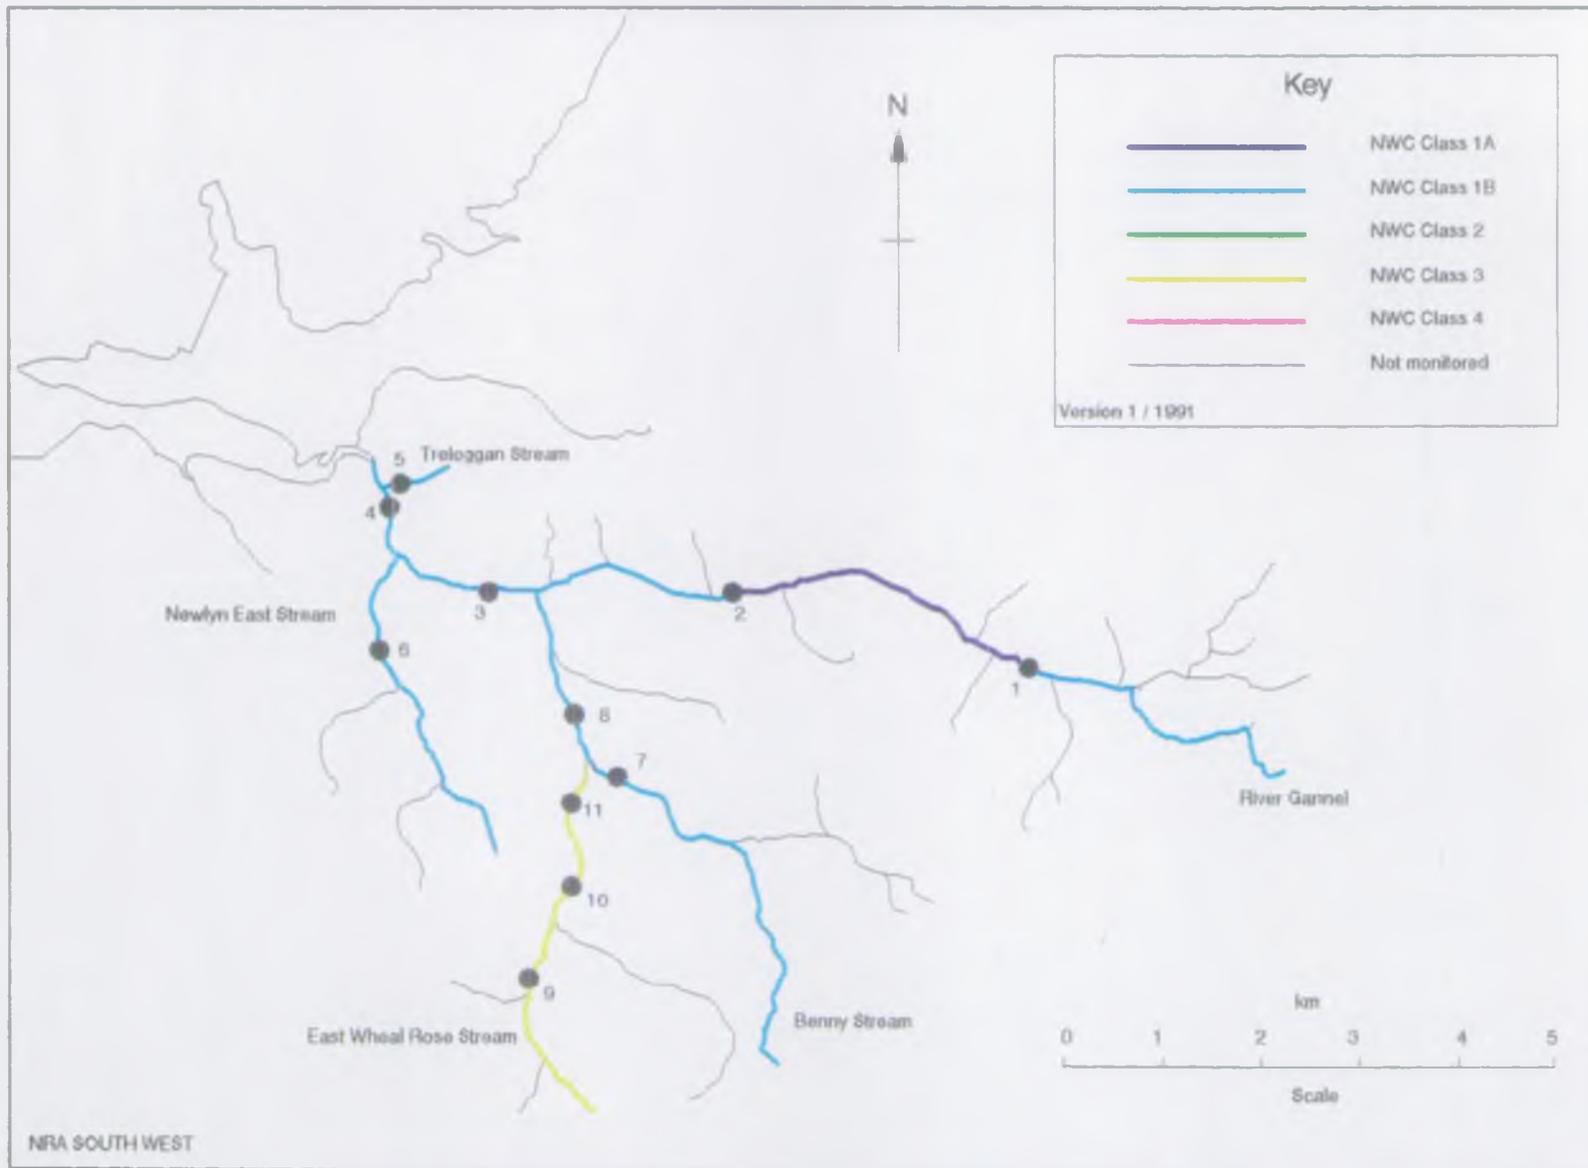

## BASIC DETERMINAND ANALYTICAL SUITE FOR ALL CLASSIFIED RIVER SITES

pH as pH Units

Conductivity at 20 C as  $\mu\text{S}/\text{cm}$

Water temperature (Cel)

Oxygen dissolved & saturation

Oxygen dissolved as  $\text{mg}/\text{l O}$

Biochemical oxygen demand (5 day total ATU) as  $\text{mg}/\text{l O}$

Total organic carbon as  $\text{mg}/\text{l C}$

Nitrogen ammoniacal as  $\text{mg}/\text{l N}$

Ammonia un-ionised as  $\text{mg}/\text{l N}$

Nitrate as  $\text{mg}/\text{l N}$

Nitrite as  $\text{mg}/\text{l N}$

Suspended solids at 105 C as  $\text{mg}/\text{l}$

Total hardness as  $\text{mg}/\text{l CaCO}_3$

Chloride as  $\text{mg}/\text{l Cl}$

Orthophosphate (total) as  $\text{mg}/\text{l P}$

Silicate reactive dissolved as  $\text{mg}/\text{l SiO}_2$

Sulphate (dissolved) as  $\text{mg}/\text{l SO}_4$

Sodium (total) as  $\text{mg}/\text{l Na}$

Potassium (total) as  $\text{mg}/\text{l K}$

Magnesium (total) as  $\text{mg}/\text{l Mg}$

Calcium (total) as  $\text{mg}/\text{l Ca}$

Alkalinity as pH 4.5 as  $\text{mg}/\text{l CaCO}_3$

## MVC RIVER QUALITY CLASSIFICATION SYSTEM

River Class	Quality criteria	Remarks	Current potential uses
Class limiting criteria (95 percentile)			
1A Good Quality	(i) Dissolved oxygen saturation greater than 80% (ii) Biochemical oxygen demand not greater than 3 mg/l (iii) Ammonia not greater than 0.4 mg/l (iv) Where the water is abstracted for drinking water, it complies with requirements for A2* water (v) Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available)	(i) Average BOD probably not greater than 1.5 mg/l (ii) Visible evidence of pollution should be absent	(i) Water of high quality suitable for potable supply abstractions and for all abstractions (ii) Game or other high class fisheries (iii) High amenity value
1B Good Quality	(i) DO greater than 60% saturation (ii) BOD not greater than 5 mg/l (iii) Ammonia not greater than 0.9 mg/l (iv) Where water is abstracted for drinking water, it complies with the requirements for A2* water (v) Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available)	(i) Average BOD probably not greater than 2 mg/l (ii) Average ammonia probably not greater than 0.5 mg/l (iii) Visible evidence of pollution should be absent (iv) Waters of high quality which cannot be placed in Class 1A because of the high proportion of high quality effluent present or because of the effect of physical factors such as canalisation, low gradient or eutrophication (v) Class 1A and Class 1B together are essentially the Class 1 of the River Pollution Survey (RPS)	Water of less high quality than Class 1A but usable for substantially the same purposes
2 Fair Quality	(i) DO greater than 40% saturation (ii) BOD not greater than 9 mg/l (iii) Where water is abstracted for drinking water it complies with the requirements for A3* water (iv) Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available)	(i) Average BOD probably not greater than 5 mg/l (ii) Similar to Class 2 of RPS (iii) Water not showing physical signs of pollution other than humic colouration and a little foaming below weirs	(i) Waters suitable for potable supply after advanced treatment (ii) Supporting reasonably good coarse fisheries (iii) Moderate amenity value

3 Poor Quality	(i) DO greater than 10% saturation (ii) Not likely to be anaerobic (iii) BOD not greater than 17 mg/l. This may not apply if there is a high degree of re-aeration	Similar to Class 3 of RPS	Waters which are polluted to an extent that fish are absent only sporadically present. May be used for low grade industrial abstraction purposes. Considerable potential for further use if cleaned up
4 Bad Quality	Waters which are inferior to Class 3 in terms of dissolved oxygen and likely to be anaerobic at times	Similar to Class 4 of RPS	Waters which are grossly polluted and are likely to cause nuisance
X	DO greater than 10% saturation		Insignificant watercourses and ditches not usable, where the objective is simply to prevent nuisance developing

- Notes
- (a) Under extreme weather conditions (eg flood, drought, freeze-up), or when dominated by plant growth, or by aquatic plant decay, rivers usually in Class 1, 2, and 3 may have BODs and dissolved oxygen levels, or ammonia content outside the stated levels for those Classes. When this occurs the cause should be stated along with analytical results.
  - (b) The BOD determinations refer to 5 day carbonaceous BOD (ATU). Ammonia figures are expressed as  $\text{NH}_4$ . \*\*
  - (c) In most instances the chemical classification given above will be suitable. However, the basis of the classification is restricted to a finite number of chemical determinands and there may be a few cases where the presence of a chemical substance other than those used in the classification markedly reduces the quality of the water. In such cases, the quality classification of the water should be down-graded on the basis of biota actually present, and the reasons stated.
  - (d) EIFAC (European Inland Fisheries Advisory Commission) limits should be expressed as 95 percentile limits.

\* EEC category A2 and A3 requirements are those specified in the EEC Council directive of 16 June 1975 concerning the Quality of Surface Water intended for Abstraction of Drinking Water in the Member State.

\*\* Ammonia Conversion Factors

(mg  $\text{NH}_4$ /l) to mg N/l)

Class 1A	0.4 mg $\text{NH}_4$ /l = 0.31 mg N/l
Class 1B	0.9 mg $\text{NH}_4$ /l = 0.70 mg N/l
	0.5 mg $\text{NH}_4$ /l = 0.39 mg N/l

## NWC RIVER CLASSIFICATION SYSTEM

## CRITERIA USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION FOR NON-METALLIC DETERMINANDS

River Class	Quality Criteria
1A	Dissolved oxygen % saturation greater than 80% BOD (ATU) not greater than 3 mg/l O Total ammonia not greater than 0.31 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 21.5 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
1B	Dissolved oxygen % saturation greater than 60% BOD (ATU) not greater than 5 mg/l O Total ammonia not greater than 0.70 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 21.5 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
2	Dissolved oxygen & saturation greater than 40% BOD (ATU) not greater than 9 mg/l O Total ammonia not greater than 1.56 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 28 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
3	Dissolved oxygen % saturation greater than 10% BOD (ATU) not greater than 17 mg/l O
4	Dissolved oxygen % saturation not greater than 10% BOD (ATU) greater than 17 mg/l O

## STATISTICS USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION

Determinand	Statistic
Dissolved oxygen	5 percentile
BOD (ATU)	95 percentile
Total ammonia	95 percentile
Non-ionised ammonia	95 percentile
Temperature	95 percentile
pH	5 percentile
Suspended solids	95 percentile arithmetic mean

## NWC RIVER CLASSIFICATION SYSTEM

## CRITERIA USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION FOR METALLIC DETERMINANDS

## SOLUBLE COPPER

Total Hardness (mean) mg/l CaCO <sub>3</sub>	Statistic	Soluble Copper*	
		Class 1 ug/l Cu	Class 2
0 - 10	95 percentile	< = 5	> 5
10 - 50	95 percentile	< = 22	> 22
50 - 100	95 percentile	< = 40	> 40
100 - 300	95 percentile	< = 112	> 112

\* Total copper is used for classification until sufficient data on soluble copper can be obtained.

## TOTAL ZINC


Total Hardness (mean) mg/l CaCO <sub>3</sub>	Statistic	Total Zinc		
		Class 1 ug/l Zn	Class 2	Class 3
0 - 10	95 percentile	< = 30	< = 300	> 300
10 - 50	95 percentile	< = 200	< = 700	> 700
50 - 100	95 percentile	< = 300	< = 1000	> 1000
100 - 300	95 percentile	< = 500	< = 2000	> 2000

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION  
 1991 RIVER WATER QUALITY CLASSIFICATION  
 CATCHMENT: GANNEL

1991 Map Position Number	River	Reach upstream of	User Reference Number	National Grid Reference
1	GANNEL	PERROSE	R24A008	SW 8842 5827
2	GANNEL	KESTLE MILL BRIDGE	R24A005	SW 8500 5931
3	GANNEL	GWILLS GAUGING STATION	R24A006	SW 8293 5927
4	GANNEL	TREVENPER	R24A009	SW 8192 5992
5	TRELOGGAN STREAM TRELOGGAN STREAM	A3075 ROUNDABOUT NORMAL TIDAL LIMIT (INFERRED STRETCH)	R24A018	SW 8196 6007
6	NEWLYN EAST STREAM NEWLYN EAST STREAM	ROSECLISTON GANNEL CONFLUENCE (INFERRED STRETCH)	R24A012	SW 8170 5880
7	BENNY STREAM	BENNY MILL BRIDGE	R24A004	SW 8416 5742
8	BENNY STREAM BENNY STREAM	TREWERRY MILL GANNEL CONFLUENCE (INFERRED STRETCH)	R24A010	SW 8373 5801
9	EAST WHEAL ROSE STREAM	EAST WHEAL ROSE BRIDGE	R24A001	SW 8347 5523
10	EAST WHEAL ROSE STREAM	METHA BRIDGE	R24A003	SW 8391 5635
11	EAST WHEAL ROSE STREAM EAST WHEAL ROSE STREAM	BENNY BRIDGE BENNY STREAM CONFL. (INFERRED STRETCH)	R24A011	SW 8380 5727

Reach Length (km)	Distance from source (km)	River Quality Objective	85	86	87	88	89	90	91
			NWC Class						
2.7	2.7	1B	2	2	2	2	2	2	1B
4.0	6.7	1A	2	2	2	2	2	1B	1A
2.3	9.0	1B	1B	2	1B	1B	1B	1B	1A
1.5	10.5	1B	1B	2	1B	1B	1B	2	2
0.6	0.6	1B							1A
0.1	0.7	1B							1A
2.6	2.6	1B	1B		1B	2	2	2	1A
1.1	3.7	1B	1B		1B	2	2	2	1A
4.0	4.0	1B	1B	2	1B	3	4	4	1B
0.7	4.7	1B	1B	2	2	2	2	2	2
1.3	6.0	1B	1B	2	2	2	2	2	2
1.5	1.5	3	3	3	3	3	3	3	3
1.4	2.9	3	3	2	3	3	3	3	3
1.0	3.9	3	3	2	2	2	2	3	3
0.4	4.3	3	3	2	2	2	2	3	3


# Gannel Catchment Water Quality - 1991

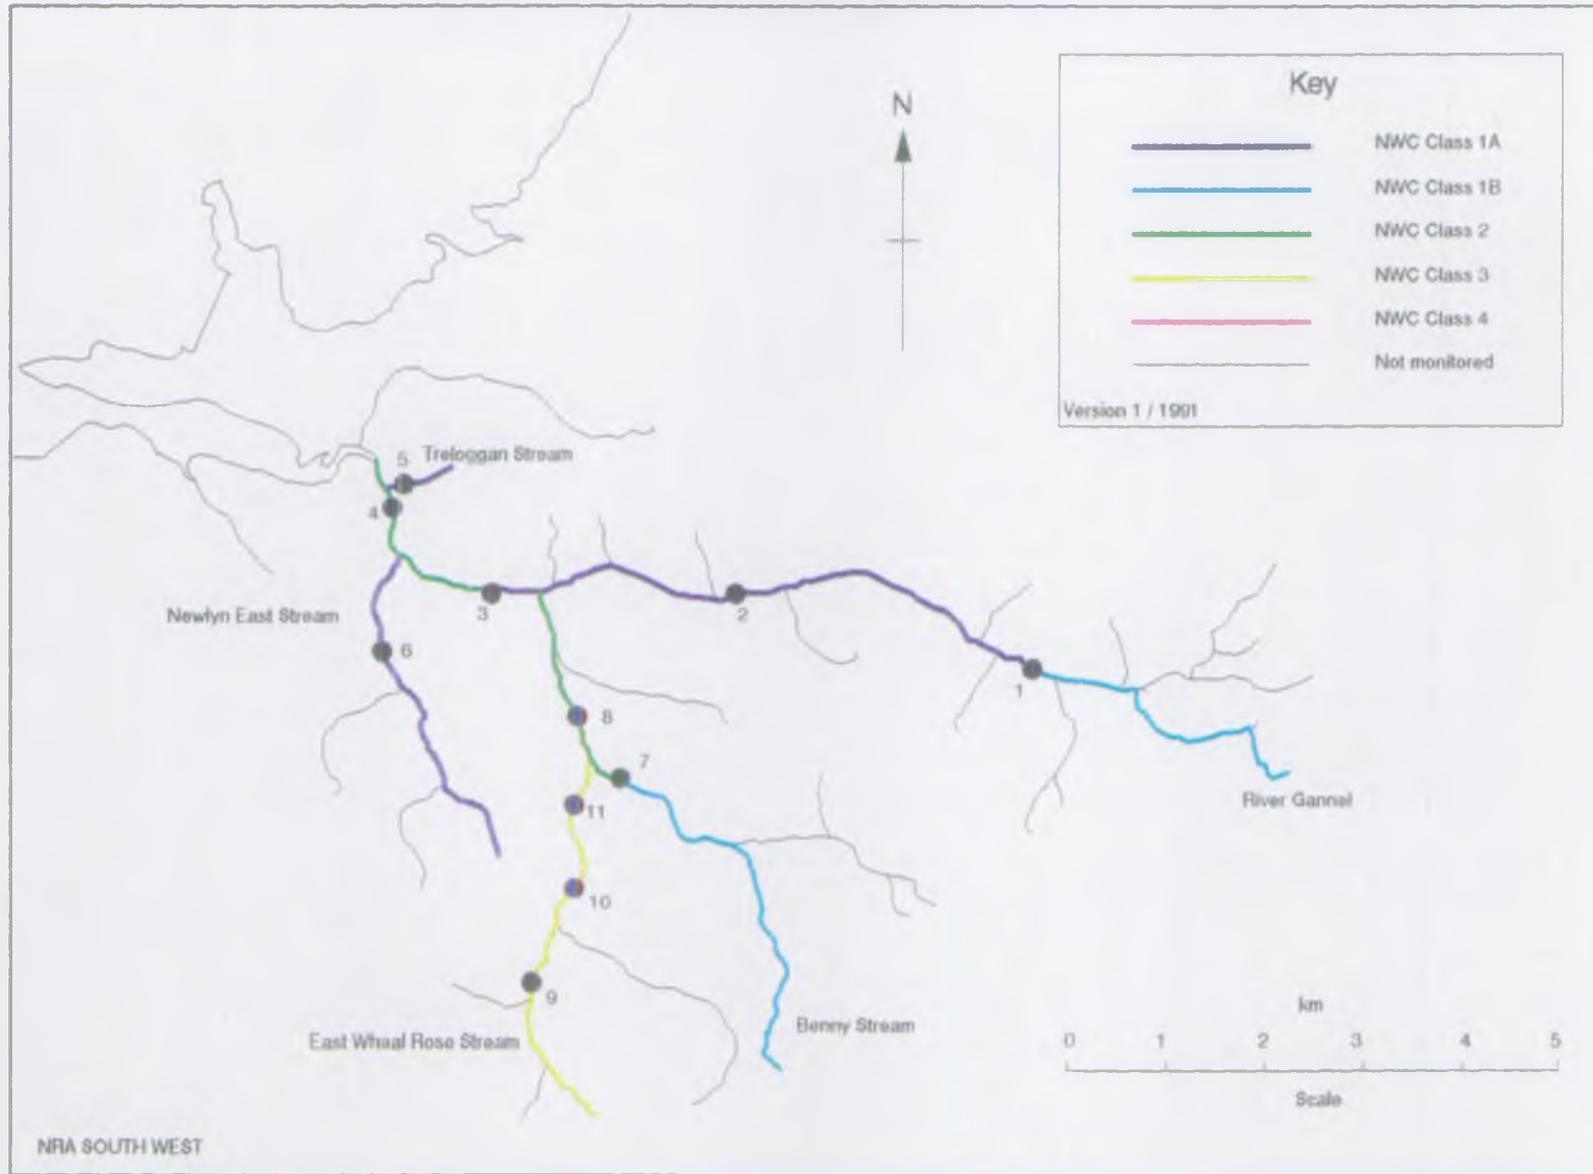

INCIDUAL RIVERS AUTHORITY - SOUTH WEST REGION  
 1991 RIVER WATER QUALITY CLASSIFICATION  
 CALCULATED DETERMINAND STATISTICS USED FOR QUALITY ASSESSMENT  
 CATCHMENT: GANNEL

River	Reach upstream of	User Ref. Number	RQO	Calculated Determinand Statistics used for Quality Assessment																			
				pH Lower Class 5tile		pH Upper Class 95tile		Temperature Class 95tile		DD (%) Class 5tile		BOD (RTU) Class 95tile		Total Ammonia Class 95tile		Union. Ammonia Class 95tile		S.Solids Class Mean		Total Copper Class 95tile		Total Zinc Class 95tile	
GANNEL	PENROSE	R24A008	1B	1A	6.8	1A	7.6	1A	16.4	1B	77.0	1B	3.2	1B	0.487	1A	0.010	1A	7.7	1A	18.8	1A	110.8
GANNEL	KESTLE MILL BRIDGE	R24A005	1A	1A	6.7	1A	7.8	1A	16.7	1A	82.3	1A	2.8	1A	0.183	1A	0.010	1A	9.2	1A	37.0	1A	201.3
GANNEL	GWILLS GAUGING STATION	R24A006	1B	1A	6.7	1A	7.7	1A	16.9	1A	81.4	1A	2.3	1A	0.212	1A	0.010	1A	8.3	1A	13.8	1A	291.8
GANNEL	TREVENPER	R24A009	1B	1A	7.0	1A	7.8	1A	16.8	1A	84.0	2	5.4	1B	0.404	1A	0.010	1A	9.6	1A	13.2	1A	181.8
TRIOLOGAN STREAM	A3075 ROUNDABOUT	R24A018	1B	1A	7.5	1A	8.4	1A	16.3	1A	84.5	1A	2.4	1A	0.100	1A	0.010	1A	7.8	1A	8.0	1A	71.0
NEWLAN EAST STREAM	ROSELUSTON	R24A012	1B	1A	7.1	1A	8.0	1A	16.0	1A	87.0	1A	2.1	1A	0.255	1A	0.010	1A	7.7	1A	5.3	1A	12.5
BENNY STREAM	BENNY MILL BRIDGE	R24A004	1B	1A	6.5	1A	7.6	1A	16.7	1B	77.0	1A	2.4	1A	0.192	1A	0.010	1A	5.8	1A	9.8	1A	171.3
BENNY STREAM	TREHERRY MILL	R24A010	1B	1A	6.3	1A	7.6	1A	16.6	1A	81.3	1A	2.8	1B	0.477	1A	0.010	1A	6.7	1A	9.0	2	695.0
EAST WHEAL ROSE STREAM	EAST WHEAL ROSE BRIDGE	R24A001	3	3	3.6	1A	7.5	1A	17.7	1A	85.0	1A	2.2	1A	0.172	1A	0.010	1A	3.4	2	46.3	3	1605.0
EAST WHEAL ROSE STREAM	MEDIA BRIDGE	R24A003	3	1A	5.6	1A	7.4	1A	16.6	1A	84.0	1A	2.4	3	1.732	1A	0.010	1A	7.3	1A	25.8	3	1242.5
EAST WHEAL ROSE STREAM	BENNY BRIDGE	R24A011	3	1A	6.7	1A	7.5	1A	16.6	1A	85.4	1B	3.1	2	1.306	1A	0.010	1A	6.2	1A	11.9	3	1035.0

# Gannel Catchment Compliance - 1991

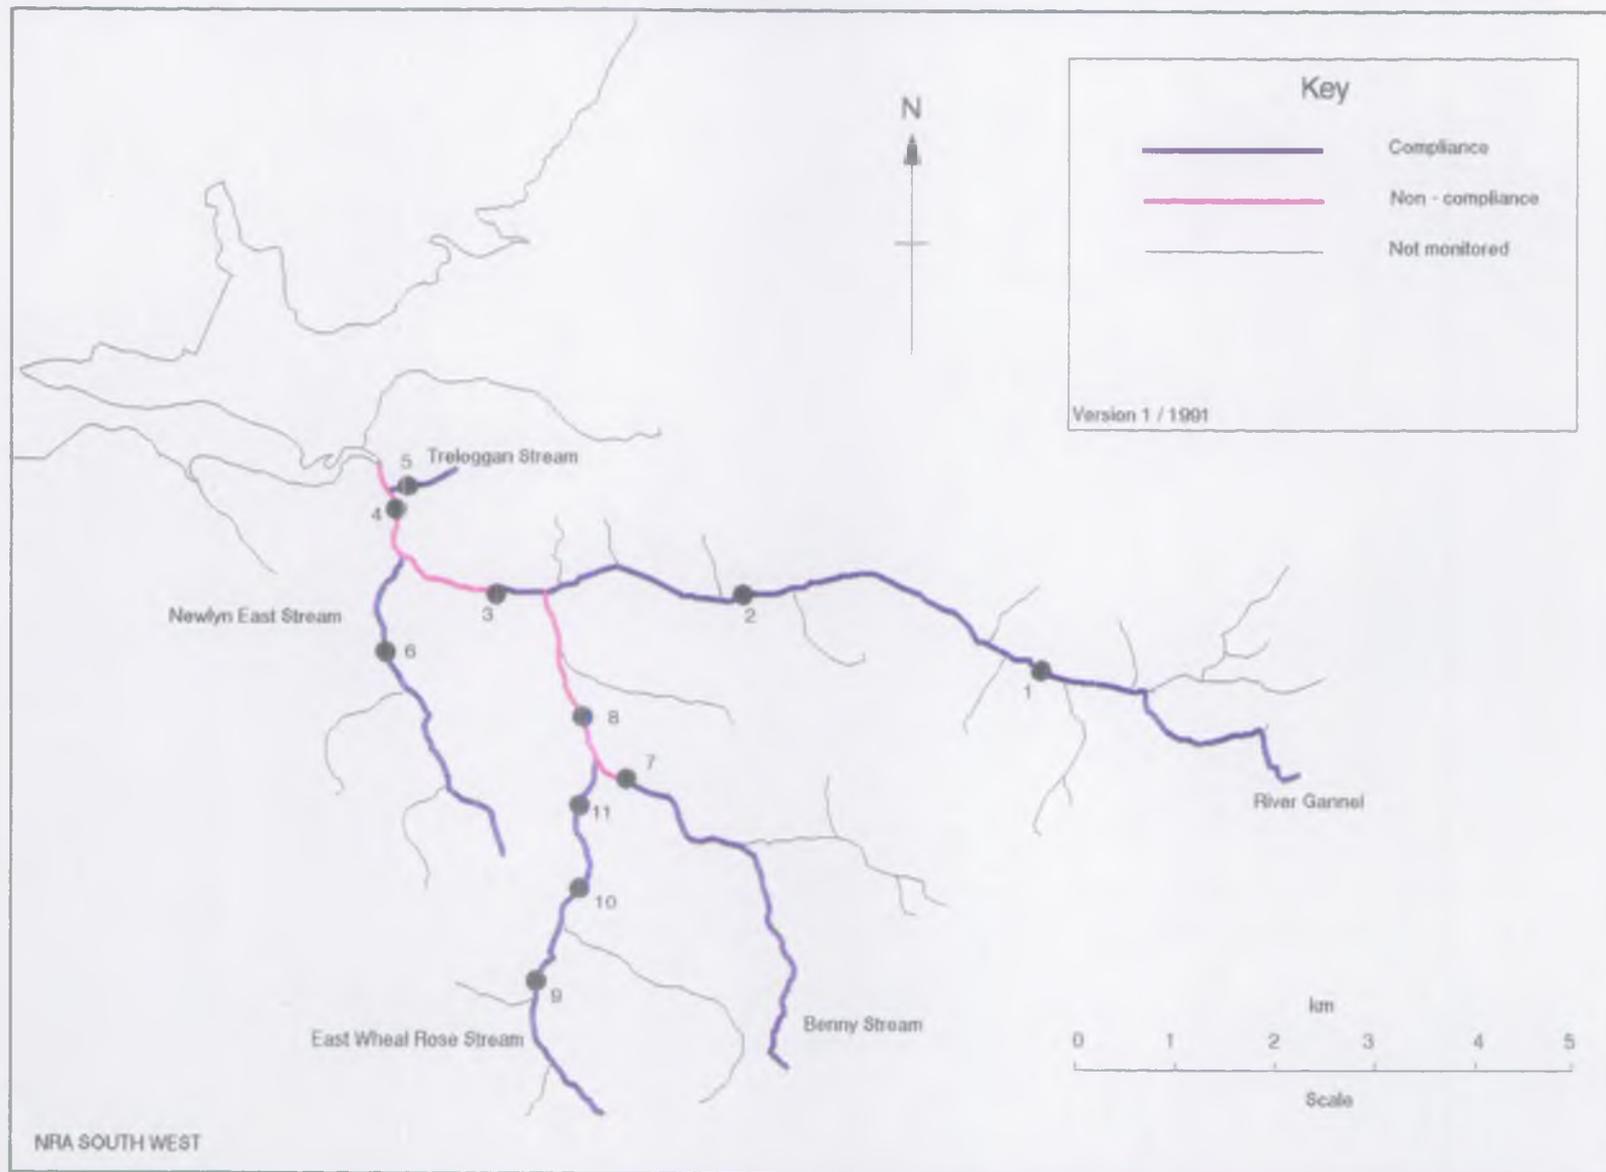

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION

1991 RIVER WATER QUALITY CLASSIFICATION

NUMBER OF SAMPLES (N) AND NUMBER OF SAMPLES EXCEEDING QUALITY STANDARD (F)

CRITERION: GANNEL

River	Reach upstream of	User Ref. Number	pH Lower		pH Upper		Temperature		DO (%)		BOD (ATU)		Total Ammonia		Union. Ammonia		S.Solids		Total Copper		Total Zinc	
			N	F	N	F	N	F	N	F	N	F	N	F	N	F	N	F	N	F	N	F
GANNEL	FERRIDGE	R24A008	34	-	34	-	34	-	34	-	34	1	34	1	33	-	34	1	31	-	31	-
GANNEL	KESTLE MILL BRIDGE	R24A005	34	-	34	-	33	-	34	1	34	1	34	-	33	-	34	2	34	-	34	-
GANNEL	HILLS GAUGING STATION	R24A006	34	-	34	-	34	-	33	-	34	-	34	-	34	-	34	2	34	-	34	-
GANNEL	TREVEPPER	R24A009	31	-	31	-	31	-	31	-	31	1	31	-	31	-	31	3	23	-	23	-
TRELOCCAN STREAM	A3075 ROUNDABOUT	R24A018	24	-	24	-	24	-	24	-	24	-	24	-	23	-	24	1	18	-	18	-
NEWLAN EAST STREAM	ROSECLISTON	R24A012	32	-	32	-	31	-	31	-	32	-	32	-	29	-	32	1	24	-	24	-
BENNY STREAM	BENNY MILL BRIDGE	R24A004	34	-	34	-	34	-	34	-	34	-	34	-	33	-	34	-	34	-	34	-
BENNY STREAM	TREWEPPY MILL	R24A010	34	-	34	-	34	-	34	-	34	-	34	-	34	-	34	1	34	-	34	23
EAST WHEAL ROSE STREAM	EAST WHEAL ROSE BRIDGE	R24A001	34	-	34	-	34	-	34	-	34	-	34	-	23	-	34	-	34	-	34	-
EAST WHEAL ROSE STREAM	MEDIA BRIDGE	R24A003	34	-	34	-	34	-	34	-	34	-	34	-	33	-	34	-	34	-	34	-
EAST WHEAL ROSE STREAM	BENNY BRIDGE	R24A011	33	-	33	-	33	-	33	-	33	-	33	-	33	-	33	-	22	-	22	-

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION  
 1991 RIVER WATER QUALITY CLASSIFICATION  
 PERCENTAGE EXCEEDENCE OF DETERMINAND STATISTICS FROM QUALITY STANDARDS  
 CATCHMENT: GANNEL

River	Reach upstream of	User Ref. Number	PERCENTAGE EXCEEDENCE OF STATISTIC FROM QUALITY STANDARD									
			pH Lower	pH Upper	Temperature	DO (%)	BOD (ATU)	Total Ammonia	Un-ionised Ammonia	Suspended Solids	Total Copper	Total Zinc
GANNEL	PERROSE	R24A008	-	-	-	-	-	-	-	-	-	-
GANNEL	KESTLE MILL BRIDGE	R24A005	-	-	-	-	-	-	-	-	-	-
GANNEL	GWILLS GAUGING STATION	R24A006	-	-	-	-	-	-	-	-	-	-
GANNEL	TREVEMPER	R24A009	-	-	-	-	-	8	-	-	-	-
TRELOGGAN STREAM	A3075 ROUNDABOUT	R24A018	-	-	-	-	-	-	-	-	-	-
NEWLYN EAST STREAM	ROSECLISTON	R24A012	-	-	-	-	-	-	-	-	-	-
BENNY STREAM	BENNY MILL BRIDGE	R24A004	-	-	-	-	-	-	-	-	-	-
BENNY STREAM	TREWERRY MILL	R24A010	-	-	-	-	-	-	-	-	-	132
EAST WHEAL ROSE STREAM	EAST WHEAL ROSE BRIDGE	R24A001	-	-	-	-	-	-	-	-	-	-
EAST WHEAL ROSE STREAM	METHA BRIDGE	R24A003	-	-	-	-	-	-	-	-	-	-
EAST WHEAL ROSE STREAM	BENNY BRIDGE	R24A011	-	-	-	-	-	-	-	-	-	-