ENVIRONMENTAL PROTECTION



National Rivers Authority
South West Region

North Devon Coast and Lyn Catchment River Water Quality Classification 1990

> NOVEMBER 1991 WQP/91/034 B L MILFORD

> > GORDON H BIELBY BSc Regional General Manager

C V M Davies
Environmental Protection
Manager

ACKNOWLEDGEMENTS

The Water Quality Planner acknowledges the substantial contributions made by the following staff:

- R. Broome Co-ordinator and Editor
- A. Burrows Production of Maps and editorial support
- P. Grigorey Production of Maps and editorial support
- B. Steele Production of Forepage
- C. McCarthy Administration and report compilation

Special thanks are extended to A. Burghes of Moonsoft, Exeter for computer support and the production of statistical schedules.

The following NRA sections also made valuable contributions:

Pollution Control Field Control and Wardens Water Resources

Thanks also to R. Hamilton and J. Murray-Bligh for their contributions.

Suggestions for improvements that could be incorporated in the production of the next Classification report would be welcomed.

Further enquiries regarding the content of these reports should be addressed to:

Freshwater Scientist,
National Rivers Authority,
Manley House,
Kestrel Way,
EXETER,
Devon EX2 7LQ




RIVER WATER QUALITY IN THE NORTH DEVON COAST AND LYN CATCHMENT

LIST OF CONTENTS

			rage 140
1	Introdu	action	1
2	North I	Devon Coast and Lyn Catchment	1
3	Nationa	al Water Council's River Classification System	2
4	1990 Ri	iver Water Quality Survey	3
5	1990 Ri	iver Water Quality Classification	3
6	Non-con	mpliance with Quality Objectives	4
7	Causes	of Non-compliance	4
8	Glossa	cy of Terms	5
9	Referen	nces	5
10	Appendi	ices:	
	10.1	River Quality Objectives including Monitoring points	
	10.2	Basic Determinand Analytical Suite	
	10.3	National Water Council (NWC) River Classification System	
	10.4	NWC Criteria for Non-Metallic Determinands - Regional Variation	
	10.4.1	NWC Criteria for Metallic Determinands — Regional Variation	
	10.5	1990 River Water Quality Classification - tabular format	
	10.6	1990 River Water Quality Classification - map format	
	10.7	Calculated Determinand Statistics used for Quality Assessment	
	10.8	Compliant/Non-Compliant River Reaches	
	10.9	Number of Samples Results exceeding quality standards	
	10.10	Percentage Exceedance of Determinand Statistics from Quality Standard	
	10.11	Identification of Possible Causes of Non-Compliance with River Quality Objectives	

National Rivers Authority South West Region

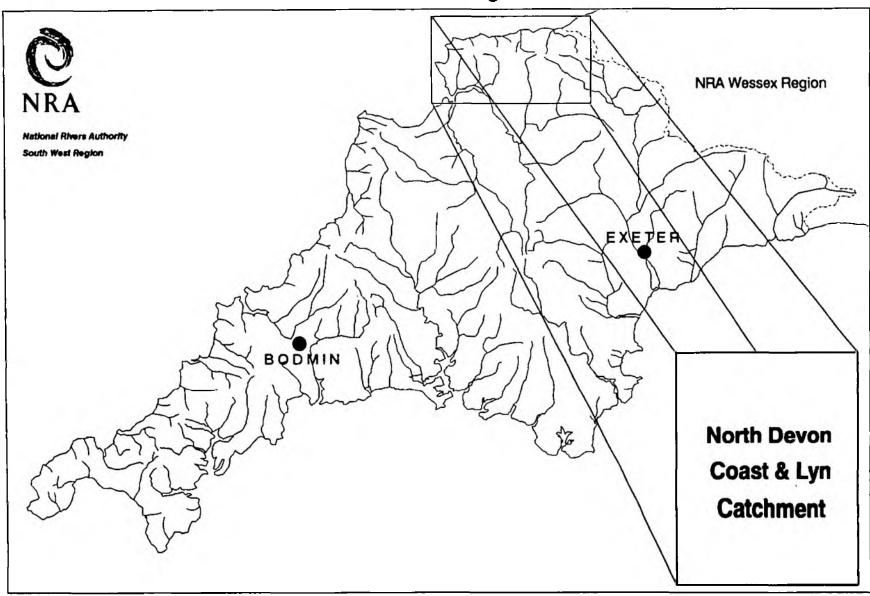

North Devon Coast & Lyn Catchment

1. INTRODUCTION

Monitoring to assess the quality of river waters is undertaken in thirty—two catchments within the region. As part of this monitoring programme samples are collected routinely from selected monitoring points at a predetermined frequency per year, usually twelve spaced at monthly intervals. Each monitoring point provides data for the water quality of a river reach (in kilometres) upstream of the monitoring point.

River lengths have been re-measured and variations exist over those recorded previously.

Each water sample collected from each monitoring point is analysed for a range of chemical and physical constituents or properties known as determinands. The analytical results for each sample are entered into a computer database called the Water Quality Archive.

Selected data are accessed from the Archive so that the quality of each river reach can be determined based on a River Classification System developed by the National Water Council (NWC), (9.1).

This report presents the river water quality classification for 1990 for monitored river reaches in the North Devon Coast and Lyn catchment.

2. NORTH DEVON COAST AND LYN CATCHMENT

The Rivers Lee (3.2 km), Wilder (4.3 km), Hele (3.6 km), Sterridge (6.7 km), Umber (5.1 km) and Heddon (8.3 km) were monitored at one location situated in the lower reaches. These sites were each sampled on twenty occasions during 1990 because of no recent water quality data.

The East Lyn flows over a distance of 15.9 km from its source to the tidal limit, (Appendix 10.1). Water quality was monitored at monthly intervals at two locations on the main river.

The following three tributaries were sampled on twenty occasions during 1990 because of no recent water quality data: Farley Water, Badgeworthy Water and Barbrook. The West Lyn was monitored at monthly intervals.

2.1 SECONDARY TRIBUTARIES

The West Lyn River (8.2 km), Farley Water (7.6 km) and Badgeworthy Water (9.4 km) were monitored at one location between their source and the confluence with the East Lyn River, (Appendix 10.1).

2.2 TERTIARY TRIBUTARIES

The Barbrook flows over a distance of 7.0 km from its source to the confluence with the West Lyn River, (Appendix 10.1). Water quality was monitored at one location in the lower reaches.

Each sample was analysed for a minimum number of determinands, (Appendix 10.2) plus additional determinands based on local knowledge of the catchment. In addition, at selected sites, certain metal analyses were carried out.

The analytical results from all of these samples have been entered into the Water Quality Archive and can be accessed through the Water Act Register, (9.2).

3. NATIONAL WATER COUNCIL'S RIVER CLASSIFICATION SYSTEM

3.1 River Quality Objectives

In 1978 river quality objectives (RQOs) were assigned to all river lengths that were part of the routine monitoring network and to those additional watercourses, which were not part of the routine network, but which received discharges of effluents.

For the majority of watercourses long term objectives were identified based on existing and assumed adequate quality for the long term protection of the watercourse. In a few instances short term objectives were identified but no timetable for the achievement of the associated long term objective was set.

The RQOs currently in use in the North Devon Coast and Lyn catchment are identified in Appendix 10.1.

3.2 River Quality Classification

River water quality is classified using the National Water Council's (NWC) River Classification System (see Appendix 10.3), which identifies river water quality as being one of five quality classes as shown in Table 1 below:

Table 1 - National Water Council - River Classification System

<u>Class</u>	Description
1A	Good quality
1B	Lesser good quality
2	Fair quality
3	Poor quality
4	Bad quality

Using the NWC system, the classification of river water quality is based on the values of certain determinands as arithmetic means or as 95 percentiles (5 percentiles are used for pH and dissolved oxygen) as indicated in Appendices 10.4.1 and 10.4.2.

The quality classification system incorporates some of the European Inland Fisheries Advisory Commission (EIFAC) criteria (Appendix 10.3) recommended for use by the NWC system.

4. 1990 RIVER WATER QUALITY SURVEY

The 1990 regional classification of river water quality also includes the requirements of the Department of the Environment quinquennial national river quality survey. The objectives for the Department of the Environment 1990 River Quality Survey are given below:

- 1) To carry out a National Classification Survey based on procedures used in the 1985 National Classification Survey, including all regional differences.
- 2) To classify all rivers and canals included in the 1985 National Classification Survey.
- 3) To compare the 1990 Classification with those obtained in 1985.

In addition, those watercourses, which were not part of the 1985 Survey and have been monitored since that date, are included in the 1990 regional classification of river water quality.

5. 1990 RIVER WATER QUALITY CLASSIFICATION

Analytical data collected from monitoring during 1988, 1989 and 1990 were processed through a computerised river water quality classification programme. This resulted in a quality class being assigned to each monitored river reach as indicated in Appendix 10.5.

The quality class for 1990 can be compared against the appropriate River Quality Objective and previous annual quality classes (1985-1989) α lso based on three years combined data, for each river reach in Appendix 10.5.

The river water classification system used to classify each river length is identical to the system used in 1985 for the Department of the Environment's 1985 River Quality Survey. The determinand classification criteria used to determine the annual quality classes in 1985, subsequent years and for 1990 are indicated in Appendices 10.4 and 10.4.1.

Improvements to this classification system could have been made, particularly in the use of a different suspended solids standard for Class 2 waters. As the National Rivers Authority will be proposing new classification systems to the Secretary of State in the near future, it was decided to classify river lengths in 1990 with the classification used for the 1985-1989 classification period.

The adoption of the revised criteria for suspended solids in Class 2 waters would not have affected the classification of river reaches.

The river quality classes for 1990 of monitored river reaches in the catchment are shown in map form in Appendix 10.6.

The calculated determinand statistics for pH, temperature, dissolved oxygen, biochemical oxygen demand (BOD), total ammonia, un-ionised ammonia, suspended solids, copper and zinc from which the quality class was determined for each river reach, are indicated in Appendix 10.7.

6. NON-COMPLIANCE WITH QUALITY OBJECTIVES

Those monitored river reaches within the catchment, which do not comply with their assigned (RQO), are shown in map form in Appendix 10.8.

Appendix 10.9 indicates the number of samples analysed for each determinand over the period 1988 to 1990 and the number of sample results per determinand, which exceed the determinand quality standard.

For those non-compliant river reaches in the catchment, the extent of exceedance of the calculated determinand statistic with relevant quality standard (represented as a percentage), is indicated in Appendix 10.10.

7. CAUSES OF NON-COMPLIANCE

For those river reaches, which did not comply with their assigned RQOs, the cause of non-compliance (where possible to identify) is indicated in Appendix 10.11.

8. GLOSSARY OF TERMS

RIVER REACH A segment of water, upstream from sampling point

to the next sampling point.

RIVER LENGTH River distance in kilometres.

RIVER QUALITY OBJECTIVE That NWC class, which protects the most sensitive

use of the water.

95 percentiles Maximum limits, which must be met for at least

95% of the time.

5 percentiles Minimum limits, which must be met for at least

95% of the time.

BIOLOGICAL OXYGEN DEMAND A standard test measuring the microbial uptake of

(5 day carbonaceous ATU) oxygen - an estimate of organic pollution.

pH A scale of acid to alkali.

UN-IONISED AMMONIA Fraction of ammonia poisonous to fish, NH³.

SUSPENDED SOLIDS Solids removed by filtration or centrifuge under

specific conditions.

USER REFERENCE NUMBER Reference number allocated to a sampling point.

INFERRED STRETCH Segment of water, which is not monitored and

whose water quality classification is assigned


from the monitored reach upstream.

9. REFERENCES

Reference

- 9.1 National Water Council (1977). River Water Quality: The Next Stage. Review of Discharge Consent Conditions. London.
- 9.2 Water Act 1989 Section 117
- 9.3 Alabaster J. S. and Lloyd R. Water Quality Criteria for Freshwater Fish, 2nd edition, 1982. Butterworths.

North Devon Coast and Lyn Catchments River Quality Objectives

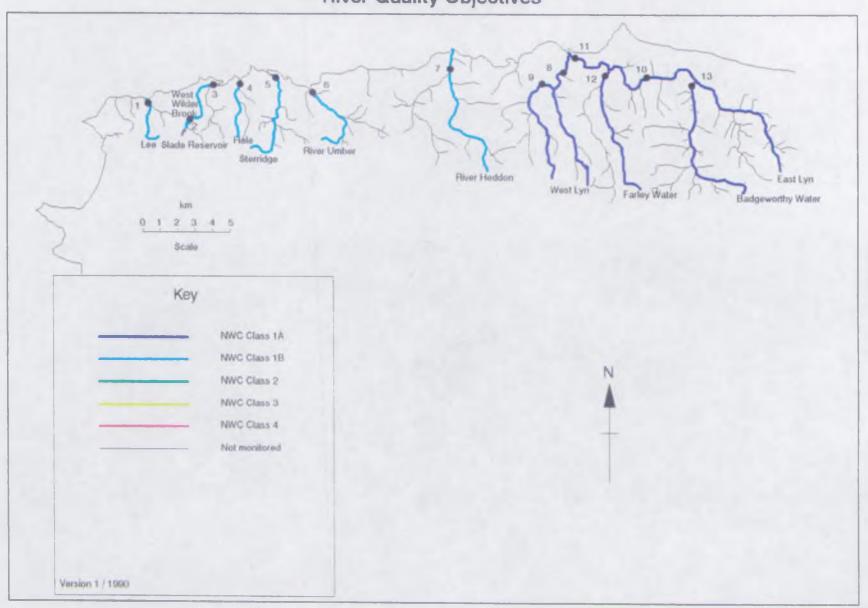

BASIC DETERMINAND ANALYTICAL SUITE FOR ALL CLASSIFIED RIVER SITES

pH as pH Units

Conductivity at 20 C as uS/cm

Water temperature (Cel)

Oxygen dissolved % saturation

Oxygen dissolved as mg/l O

Biochemical oxygen demand (5 day total ATU) as mg/l O

Total organic carbon as mg/1 C

Nitrogen ammoniacal as mg/l N

Ammonia un-ionised as mg/l N

Nitrate as mg/l N

Nitrite as mg/l N

Suspended solids at 105 C as mg/1

Total hardness as mg/l CaCO3

Chloride as mg/l Cl

Orthophosphate (total) as mg/l P

Silicate reactive dissolved as mg/l SiO2

Sulphate (dissolved) as mg/l SO4

Sodium (total) as mg/l Na

Potassium (total) as mg/1 K

Magnesium (total) as mg/l Mg

Calcium (total) as mg/l Ca

Alkalinity as pH 4.5 as mg/1 CaCO3

NWC RIVER QUALITY CLASSIFICATION SYSTEM

River Class		Quality criteria		Remarks	Curren	t potential uses
		Class limiting criteria (95 percent	ile)			
1A Good Quality	(i) (ii) (iii) (iv)	Dissolved oxygen saturation greater than 80% Biochemical oxygen demand not greater than 3 mg/l Ammonia not greater than 0.4 mg/l Where the water is abstracted for drinking water, it complies with requirements for A2* water Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available)	(i) (ii)	Average BOB probably not greater than 1.5 mg/l Visible evidence of pollution should be absent	(i) (ii) (iii)	Water of high quality suitable for potable supply abstractions and for all abstractions Same or other high class fisheries High amenity value
1B Good Quality	(i) (ii) (iii) (iv)	DO greater than 60% saturation BOD not greater than 5 mg/l Ammonia not greater than 0.9 mg/l Where water is abstracted for drinking water, it complies with the requirements for A2* water Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available)	(ii) (iii) (iii) (iv)	Average BOD probably not greater than 2 mg/l Average ammonia probably not greater than 0.5 mg/l Visible evidence of pollution should be absent Waters of high quality which cannot be placed in Class 1A because of the high proportion of high quality effluent present or because of the effect of physical factors such as canalisation, low gradient or eutrophication Class 1A and Class 1B together are essentially the Class 1 of 1 River Pollution Survey (RPS)		Water of less high quality than Class 1A but usable for substantially the same purposes
2 Fair Quality	(i) (ii) (iii)	DO greater than 40% saturation BOD not greater than 9 mg/l Where water is abstracted for drinking water it complies with the requirements for A3* water Non-toxic to fish in EIFAC terms (or best estimates if EIFAC figures not available)	(i) (ii) (iii)	Average BOD probably not greater than 5 mg/l Similar to Class 2 of RPS Water not showing physical signs of pollution other than humic colouration and a little foaming below weirs	(i) (ii) (iii)	Waters suitable for potable supply after advanced treatment Supporting reasonably good coarse fisheries Moderate amenity value

3 Poor Quality

- (i) DO greater than 10% saturation
- (ii) Not likely to be anaerobic
- (iii) BOD not greater than 17 mg/l. This may not apply if there is a high degree of re-aeration

Similar to Class 3 of RPS

Waters which are polluted to an extent that fish are absenonly sporadically present. May be used for low grade industrial abstraction purposes. Considerable potential for further use if cleaned up

4 Bad Qualit Waters which are inferior to Class 3 in terms of dissolved oxygen and likely to be anaerobic at times Similar to Class 4 of RPS

Waters which are grossly polluted and are likely to cause nuisance

X

DO greater than 10% saturation

Insignificant watercourses and ditches not usable, where the objective is simply to prevent nuisance developing

Notes

- [a] Under extreme weather conditions (eg flood, drought, freeze-up), or when dominated by plant growth, or by aquatic plant decay, rivers usually in Class 1, 2, and 3 may have BODs and dissolved oxygen levels, or ammonia content outside the stated levels for those Classes. When this occurs the cause should be stated along with analytical results.
- (b) The BOD determinations refer to 5 day carbonaceous BOD (ATU). Ammonia figures are expressed as NH4. **
- (c) In most instances the chemical classification given above will be suitable. However, the basis of the classification is restricted to a finite number of chemical determinands and there may be a few cases where the presence of a chemical substance other than those used in the classification markedly reduces the quality of the water. In such cases, the quality classification of the water should be down-graded on the basis of biota actually present, and the reasons stated.
- (d) EIFAC (European Inland Fisheries Advisory Commission) limits should be expressed as 95 percentile limits.

EEC category A2 and A3 requirements are those specified in the EEC Council directive of 16 June 1975 concerning the Quality of Surface Water Intended for Abstraction of Drinking Water In the Member State.

** Ammonia Conversion Factors

(mg NH $_4$ /1 to mg N/1)

Class 1A 0.4 mg NH₄/1 = 0.31 mg N/1 Class 1B 0.9 mg NH₄/1 = 0.70 mg N/1

 $0.5 \text{ mg NH}_4/1 = 0.39 \text{ mg N/1}$

NWC RIVER CLASSIFICATION SYSTEM

CRITERIA USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION FOR NON-METALLIC DETERMINANDS

River Class	Quality Criteria
1A	Dissolved oxygen % saturation greater than 80% BOD (ATU) not greater than 3 mg/l 0 Total ammonia not greater than 0.31 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 21.5 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
1B	Dissolved oxygen % saturation greater than 60% BOD (ATU) not greater than 5 mg/l 0 Total ammonia not greater than 0.70 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 21.5 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
2	Dissolved oxygen & saturation greater than 40% BOD (ATU) not greater than 9 mg/l O Total ammonia not greater than 1.56 mg/l N Non-ionised ammonia not greater than 0.021 mg/l N Temperature not greater than 28 C pH greater than 5.0 and less than 9.0 Suspended solids not greater than 25 mg/l
3	Dissolved oxygen % saturation greater than 10% BOD (ATU) not greater than 17 mg/l O
4	Dissolved oxygen % saturation not greater than 10% BOD (ATU) greater than 17 mg/l 0

STATISTICS USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION

Determinand	Statistic
Dissolved oxygen	5 percentile
BOD (ATU)	95 percentile
Total ammonia	95 percentile
Non-ionised ammonia	95 percentile
Temperature	95 percentile
рН	5 percentile
•	95 percentile
Suspended solids	arithmetic mean

NWC RIVER CLASSIFICATION SYSTEM

CRITERIA USED BY NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION FOR METALLIC DETERMINANDS

SOLUBLE COPPER

Total Hardness (mean) mg/l CaCO3	Statistic	Soluble Copper* ug/i Cu Class 1 Class 2
0 - 10 10 - 50	95 percentile 95 percentile	<= 5 > 5 <= 22 > 22
50 - 100 100 - 300	95 percentile 95 percentile	<pre></pre>

* Total copper is used for classification until sufficient data on soluble copper can be obtained.

TOTAL ZINC

Total Hardness (mean) mg/l CaCO3	Statistic		otal Zinc ug/l Zn Class 2 Class 3
0 - 10	95 percentile	•	< = 300 > 300
10 - 50 50 - 100	95 percentile 95 percentile		< = 700 > 700 < = 1000 > 1000
100 - 300	95 percentile	< = 500	< = 2000 > 2000


NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION

1990 RIVER WATER QUALITY CLASSIFICATION

CATCHMENT: LYN (34)

1990 Map	River	Reach upstream of	User	National	Reach	Distance	River	85	86	87	88	89	90
Position		į -	Reference	Grid	Length	from	Quality	NWC	NWC	MAC	NWC	NWC	NWC
Number		1	Number	Reference	(km)	source	Objective	Class	Class	Class	Class	Class	Class
į		!	1	!		(km)	<u> </u>	!	[!	!	1
! !			ļ									!	
1	LEE STREAM	PRIOR TO BEACH	R31A001	SS 4798 4650	3.2	3.2	18	-				<u> </u>	4
	WEST WILDER BROOK	INFLOW, L. SLADE RES. (UNMON. STRETCH)	-¦	 	0.8	0.8	18				¦	¦	¦
2 i	WEST WILDER BROOK	LOWER SLADE RESERVOIR	R31A015	SS 5062 4567	0.4	1.2	18	i	i i	i i	Ì	i	į 2
3 i	WEST WILDER BROOK	PRIOR TO BEACH	R31A002	SS 5178 4777	3.0	4.2	18	i i	i i		į i	i	1B
į	WEST WILDER BROOK	MEAN HIGH WATER (INFERRED STRETCH)	į	į	0.1	4.3	18			į		į	18
4	HELE STREAM	PRIOR TO BEACH	R31A003	ss 5355 4787	3.6	3.6	1B			—		<u> </u>	2
5	STERRIDGE	PRIOR TO BEACH	R31A004	SS 5557 4818	6.7	6.7	1B					<u> </u>	1A
6	UPBER	FRIOR TO BEACH	R31A005	SS 5767 4725	5.1	5.1	18						18
 ¦	HEDDON	BELOW TRENTSHOE STREAM CONFLUENCE	R31A006	SS 6549 4841	7.0	7.0	18						1A
į	HEDDON	MEAN HIGH WATER (INFERRED STRETCH)			1.3	8.3	18	1.3.					1A
8	WEST LYN	LYN BRIDGE	R32A003	SS 7198 4854		7.2		1A	1A	IA	1A	1A	2
ľ	WEST LYN	NORMAL TIDAL LIMIT (INFERRED STRETCH)		ļ	1.0	8.2	1A [1A	1A	IA	LA (1A	2
 ¦	BARBROOK	DEAN	R32A006	SS 7087 4781	6.4	6.4	1.8		;	;			2
ļ	BARBROOK	WEST LYN CONFLUENCE (INFERRED STRETCH)]		0.6	7.0	. 1x						2
	EAST LYN RIVER	LEEFORD	R32A001	SS 7697 4829	8.7	8.7		1A	1A	1A	2	18	2
11	EAST LYN RIVER	LYNMOUTH	R32A002	SS 7240 4946	7.2	15.9	1A	1A	1.4	ᇄᆝ	14	1A	1A
12	FARLEY WATER	WATERSMEET	R32A004	SS 7435 4858	7.5	7.5	TA	1B	<u> </u>	i	—-;		LA
ļ	PARLEY WATER	EAST LYN CONFLUENCE (INFERRED STRETCH)		ļ	0.1	7.6	1.8	1B	!	!	!	ļ	1A
1	BADGMORTHY WATER	MALMSMEAD BRIDGE	R32A005	SS 7918 4770	9.0	9.0	1A	1B		¦			1A
- 1	BADGWORTHY WATER	EAST LYN CONFLUENCE (INPERRED STRETCH)	1 1	İ	0.4	9.4	1A (18	l	ĺ	l	l i	1A

North Devon Coast and Lyn Catchments Water Quality - 1990

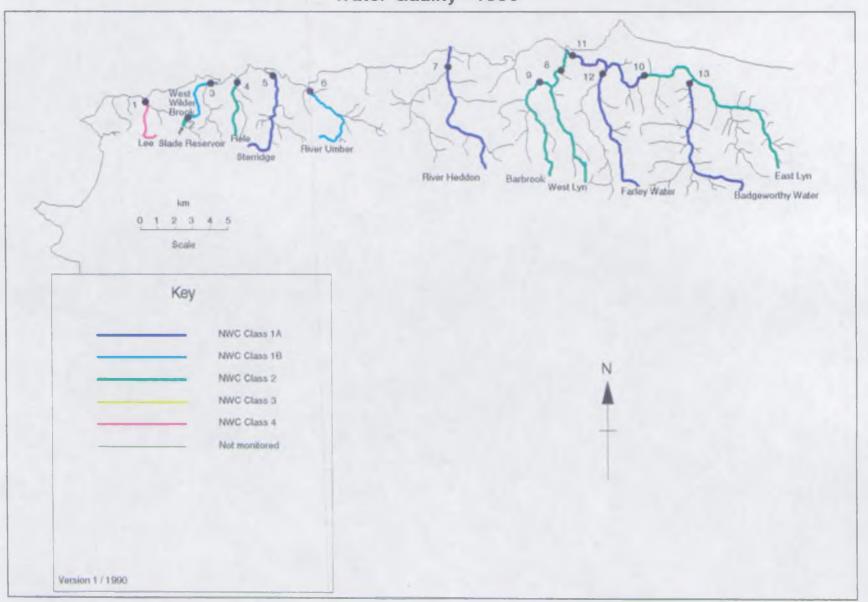


NACIONAL RIVERS AUTHERTY - SOUTH WEST REGION 1990 RIVER WIDER QUALITY CLASSIFICATION

CALCULATED DETERMINAND STREETINGS USED FOR QUALITY ASSESSMENT

CHICHENT: NORTH DEVON COAST AND LYN (34)

River	Reach upstrees of	User	90	1		Calcul	ated Dat	eunirer	nd Statis	tics u	ed for Q	ulity	A696508	rst.									
	i	i Ref.	N-C	ĺ				1		1		l -		1		1		1		1		1	
	j	Number	Class	ъR	Lower	TH.	Upper	Tem	endare	i no	(%)	i BOD	(UZU)	Potal	Amonia	Union.	Aumonda	i s.s	olids	i Total	LOpper	i 10ta	1 Zinc
	i	i	i	Class			95tile		95kile	•	Skile	•	95kile	•				•	Mean		95 % ile	•	95%ile
	i	i						<u> </u>				¦ —		}	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			; —		i		i —	
		1	1			1		1				1		ł		1		:		ł			
	1	i	<u> </u>	i				ì		ì		i		ì		ì		i		ì			
LEE STREEM	PRIOR TO BEACH	R31A001	4	1A	7.1	1A	7.8	1A	18.9	3	19.2	4	18.6	3	2.336	13	0.020	1A	11.6	1A	10.8	I IA	12.0
WEST WILLDER BROOK	LONER SLAVE RESERVOIR	R31A015	2	1A	7.3	1A	8.7	2	22.5	1A	86.0	LA.	3.0	1B	0.420	╁		1A	5.8	}	-	├-	
WEST WILDER ERCOR	HOKER OF SUBSE	R31A002	18	2A	7.5	1A	8.0	1A	18.9	I JA	89.3	118	4.2	į 1A	0.156	j 1A	0.010	1A	14.5	1 A	6.7	Į IA	19.6
MAGNE ALH	PRODR TO HEACH	R31A003	2	1A	7.7	1A	8.2	1A	18.0	18	73.6	2	7.2	1A	0.120	1A	0.010	1A	17.7	IX.	7.0	13	45.3
SIDERIUS	PROUGR TO BEACH	R31A004	1A	14	7.6	1A	8.2	1A	18.0	1A	82.0	1A	2.9	1A	0.260	13	0.010	1A	10.6	1A	5.0	IA	8.0
UMBER	PRIOR TO BEACH	R31A005	1B	13.	7.6	12	8.4	1A	18.0	1 A	90.1	18	4.4	1B	0.316	1A	0.010	13	8.7	1A	10.8	13	14.0
HEIDON	BELOW TRENTISHOE STREEM CONFLUENCE	R31/A006	1A	13.	7.1	11.	7.9	1A	17.0	1A	90.0	1A	2.5	13	0.160	1A	0.010	1A	8.8	13	9.0	1A	15.0
WEST LIN	IN BUILDE	R32N003	2	13.	7.1	1A	7.7	1A	16.7	2	52.0	1A	2.2	1A	0.036	13.	0.010	1A	3.6	13.	10.8	1A	15.8
ENTERCOK	CEPN	R327006	2	13.	6.9	1A	7.6	I IA	18.9	1A	84.3	1B	3.1	124	0.097	13	0.010	1A	8.2	2	47.8	1A	47.9
east ian river	LESPORD	[R32N001	1 2	1A	7.0	1A	8.3	l 1A	17.0	1B	69.3	2	7.2	IA.	0.047	124	0.010	1A	2.5	╁╼		├-	_
east lyn river	TRINCOTH	R322002	1A	Į JA	7.0	Į JA	8.3	Į ĮĄ.	17.0	1A	84.3	į 1A	1.8	j 1A	0.028	1A	0.010	1A	2.4	1	5.0	11.	9.8
PARLEY WICER	MODESPEET	R32M004	1A	1A	7.1	1A	7.8	1A	17.0	14	90.0	Į JA	1.9	1A	0.040	1A	0.010	1A	3.1	18	5.0	124	6.0
BADOMORDHY WICES	PALMENEAD ERIDGE	F32N005	<u> </u>	1A	6.8	1A	7.9	1A	17.0	אנ	88.1	IA	1.9	LA	0,029	1A	0.010	1A	3.5	1A	5.0	1A	27.6

North Devon Coast and Lyn Catchments Compliance - 1990

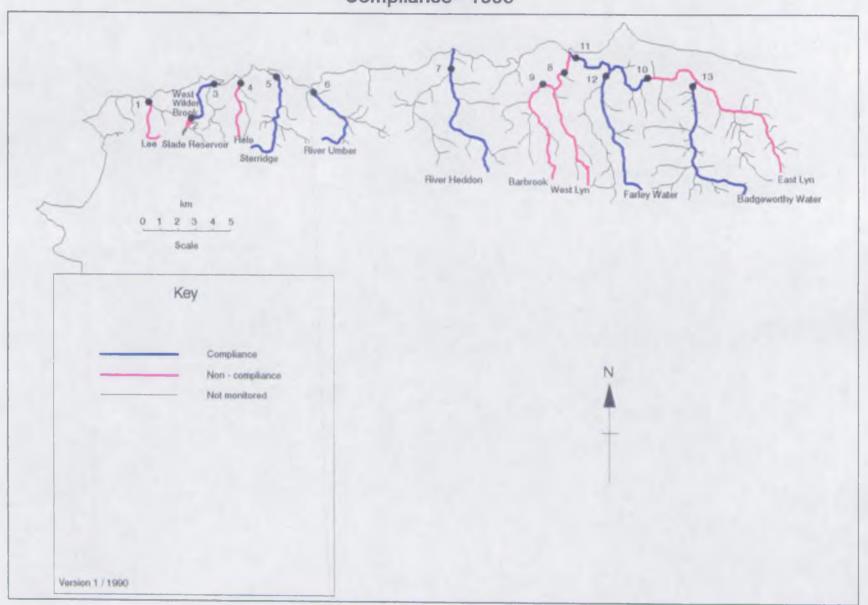

MINIMAL RIVERS MUHRRITY — SOUTH WEST REGION 1990 RIVER WRIER QUALITY CLASSIFICATION

NAMER OF SHIPLES (II) AND NAMER OF SHIPLES EXCEEDING QUALITY STINDARD (F)

CRECHMENT: NORTH DEVON COAST AND DAN (34)

River	Reach upstreem of	User	th r	CMSC	pHt	fiber	Temper	eture	1 20	(\$)	BOD (/	ATU)	Total .	Ameria	Union.	Amonda	Ş.So	Lids	Total	Oppper	Total	Zirk
		Ref. Number	N	F	 N	2	 197	F	N	F	 197	7	 N	F	 19	F	N	F	 N	F	N	P
					!		į Į		! !		<u>.</u> !		į !		į !				į !			
DE STREAM	 	R31A001	20	_	20		20	-	 	2	 20	3	20	3	19		20	2	20	-	20	_
10.25	1	1			i		i		i	-	i	-	i		i		_	_	i			
WEST WILLDER EROCK	LONER SLAIE RESERVOIR	R31A015	12	_	12	_	12	1	12	-	12	_	12	-	8	-	12	-	12	-	12	_
WEST WILLDER ERCCK	PRIOR TO BEACH	[R31A002]	22	-	22 	-	22	-	J 22	-	22 	-	22	-	22	-	22	3	22	-) 22 	-
HELE STREAM	PRIOR TO BEACH	R31A003	20	-	20		20	-	20	-	20	1	20	_	19	-	20	6	20	1021	20	
STANKETOES	PRIOR TO BEACH	R31A004	18		18	_	18	-	18	_	18	-	18	_	18	-	16	1	18	ar g t.	1.6	-
UMER	PRIOR TO BEACH	7312005	20	-	20	-	20	-	20		20	-	20	-	16	-	20	2	20	- 6	20	
PODN	HEADY TREATHER STREM COPILEYE	F31A006	18	-	18	To Take	18		18		18	-	18	-	16	-	18	2	18	0.5	18	-
HEST LIM	LN RUE	R322003	23		23	-	22	-	22	1	23	-	23	-	16	-	23	1	23	1 7 - 1	23	-
BWBCCK	DEAN	R32006	20	-	20		20		20	_	20	1	20	_	17	-	20	1	20	1	20	-
EAST LAW RIVER	LEWINH	R32N002	23	-	23	-	23	-	22	-	23	-	23		17	-	23	-	23	1 -	23	
PAGEY WOOR	NEW STATE OF THE S	R32N004	19		19	-	19	-	19		19	-	19	-	12	-	19	-	19	-	19	-
SACONCRORY WRITER	PATHEMEND BRIDGE		21		21	_	21		21		21		21	-	14	-	21	-	21	U y s/	21	

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION

1990 RIVER WATER QUALITY CLASSIFICATION

PERCENTAGE EXCEEDENCE OF DETERMINAND STATISTICS FROM QUALITY STANDARDS

CATCHMENT: NORTH DEVON COAST AND LYN (34)

River	Reach upstream of	User		PERCENTAGE	EXCEEDENCE OF	STATISTIC	FROM QUALIT	Y STANDARD)			
	1	Ref.		1	1		1 1			i i		i
		Rumber 	pH Lower	pH Upper 	Temperature 	DO (%)	BOD (ATU)	Total Ammonia	Un-ionised Ammonia 	Suspended Solids	Total Copper	Total Zinc
LEE STREAM	FRIOR TO BEACH	 		-		68	 	234				
		i i		i	i i		i i				. " 0	
WEST WILDER BROOK	LOWER SLADE RESERVOIR	R31A015			i 5		-	_		C# 3	(-)	(- 1
WEST WILDER BROOK	PRIOR TO BEACH	R31A002	-	-	: ' - ': '	+ 2	-	-	4.5	-	-	_
HELE STREAM	PRIOR TO BEACH	R31A003	-	19-17	-		44	5 4 1	-	-		
STERRIDGE	PRIOR TO BEACH	R31A004	-	45.7	-	U	-	O g if	-	-		
UMBER	PRIOR TO BEACH	R31A005		124	-	_	-					-
HEDDON	BELOW TRENTSHOE STREAM CONFLUENCE	R31A006			-	-	-	7.5			- -	•
WEST LYN	LYN BRIDGE	R32A003		-	-	35	-	-			- -	
BARBROOK	DEAN	R32A006	-	<u></u>	-	-	4	-		<u> </u>	117	-
EAST LYN RIVER	LYMPOUTH	R32A002	-	-	-		-	3.00	-			-
FARLEY WATER	WATERSMEET	R32A004	-		-	-	-	-	-			
BADGWORTHY WATER	MALMSMEAD BRIDGE	R32A005	-	-	-		-	0. 4 3	-	-	 ¦	

NATIONAL RIVERS AUTHORITY - SOUTH WEST REGION
IDENTIFICATION OF POSSIBLE CAUSES OF NON-COMPLIANCE WITH RQO
CATCHMENT: NORTH DEVEON COAST AND LYN (34)

1990 Map	River	Reach upstream of	User	Reach	Possible causes of non-compliance
Position	1		Reference	Length	
Number	1		Number	(km)	
	1		1 1		
	I	l	i i		
	1		1 1		
1	LEE STREAM	PRIOR TO BEACH	R31A001	3.2	FARMING ACTIVITIES, INDUSTRIAL DISCHARGE
	I	I	II		<u> </u>
2	WEST WILDER BROOK	LOWER SLADE RESERVOIR	R31A015	0.4	DROUGHT, IMPOUNDMENT
	I	I			
4	HELE STREAM	PRIOR TO BEACH	R31A003	3.6	INDUSTRIAL DISCHARGE, PARMING
	1		11		<u> </u>
8	WEST LYN	LYN BRIDGE	R32A003	7.2	UP-STREAM ABSTRACTION
	<u> </u>		!I		<u> </u>
9	BARBROOK	DEAN	R32A006	6.4	WATER TREATMENT WORKS DISCHARGE, MOOLAND ORIGINS
	.I	<u> </u>	I		
10	EAST LYN RIVER	LEEFORD	R32A001	8.7	SEPTIC TANK, DROUGHT, UP-STREAM ABSTRACTIONS